

An Overview of Trilinos



Mark Hoemmen
Sandia National Laboratories
18 August 2011



Sandia is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U. S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.





Outline

- What can Trilinos do for you?
- Trilinos' software organization
- Whirlwind tour of Trilinos packages
- Getting started: “How do I...?”
- Preparation for hands-on tutorial

Trilinos Contributors

Chris Baker
Ross Bartlett
Pavel Bochev
Paul Boggs
Erik Boman
Lee Buermann
Cedric Chevalier
Todd Coffey
Eric Cyr
David Day
Karen Devine
Clark Dohrmann
Kelly Fermoye
David Gay
Jeremie Gaidamour
Mike Heroux
Ulrich Hetmaniuk
Mark Hoemmen
Russell Hooper
Vicki Howle

Jonathan Hu
Joe Kotulski
Rich Lehoucq
Kevin Long
Karla Morris
Kurtis Nusbaum
Roger Pawlowski
Brent Perschbacher
Eric Phipps
Siva Rajamanickam
Lee Ann Riesen
Marzio Sala
Andrew Salinger
Nico Schlömer
Chris Siefert
Bill Spatz
Heidi Thornquist
Ray Tuminaro
Jim Willenbring
Alan Williams
Michael Wolf

Past Contributors

Jason Cross
Michael Gee
Esteban Guillen
Bob Heaphy
Robert Hoekstra
Kris Kampshoff
Ian Karlin
Sarah Knepper
Tammy Kolda
Joe Outzen
Mike Phenow
Paul Sexton
Bob Shuttleworth
Ken Stanley




What can Trilinos do for you?

What is Trilinos?


- Object-oriented software framework for...
- Solving big complex science & engineering problems
- More like LEGO™ bricks than Matlab™






Applications

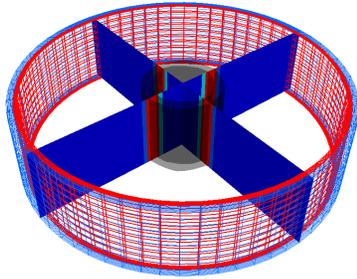

PDEs

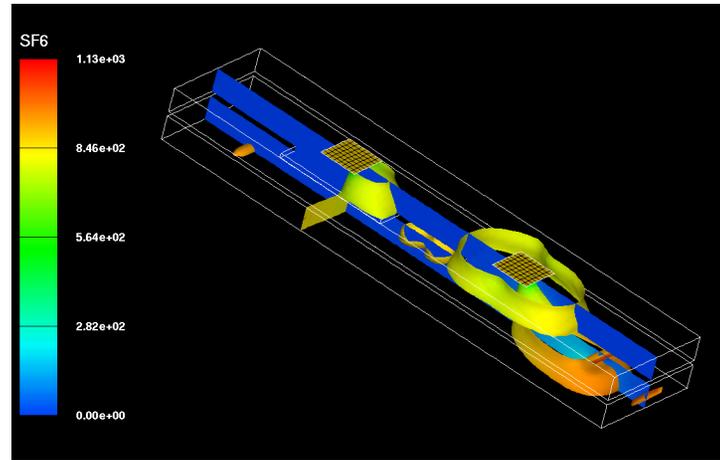


Circuits

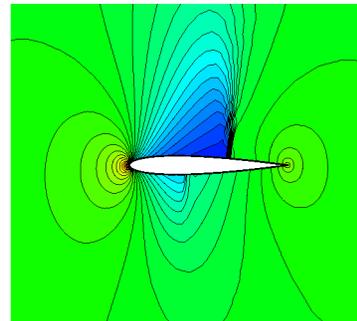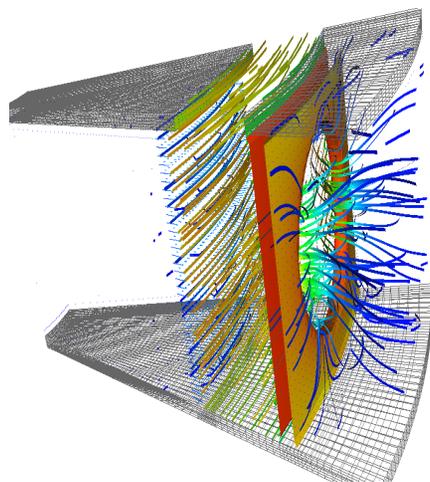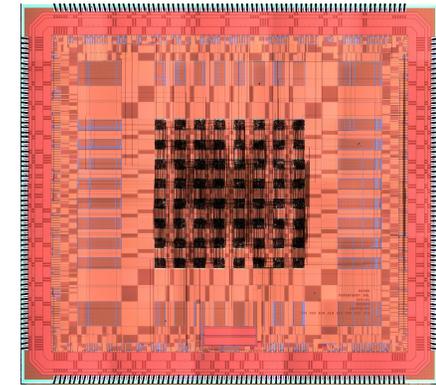

And More...

Inhomogeneous Fluids

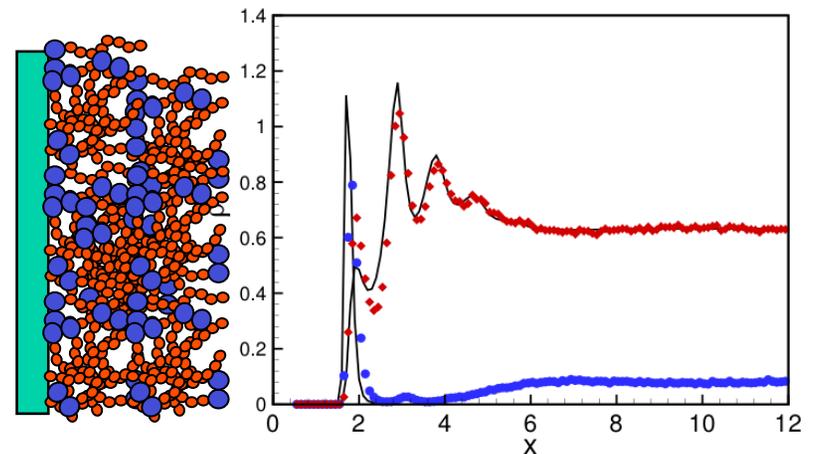

Applications

- All kinds of physical simulations:
 - ◆ Structural mechanics (statics and dynamics)
 - ◆ Circuit simulations (physical models)
 - ◆ Electromagnetics, plasmas, and superconductors
 - ◆ Combustion and fluid flow (at macro- and nanoscales)

- Coupled / multiphysics models

- Data and graph analysis
 - ◆ Even gaming!

Target platforms:

Any and all, current and future


- Laptops and workstations
- Clusters and supercomputers
 - ◆ Multicore CPU nodes
 - ◆ Hybrid CPU / GPU nodes
- Parallel programming environments
 - ◆ MPI, Pthreads, Intel TBB
 - ◆ Thrust, CUDA
 - ◆ Combinations of the above
- User “skins”
 - ◆ C++ (primary language)
 - ◆ C, Fortran, Python
 - ◆ Web (today’s hands-on!)




Unique features of Trilinos

- Huge library of algorithms
 - ◆ Linear and nonlinear solvers, preconditioners, optimization, transients, sensitivities, uncertainty, ...
- Growing support for multicore & hybrid CPU/GPU
 - ◆ Built into the new Tpetra linear algebra objects
 - Therefore into iterative solvers with zero effort!
 - ◆ Unified intranode programming model
 - ◆ Spreading into the whole stack:
 - Multigrid, sparse factorizations, element assembly...
- Growing support for mixed and arbitrary precisions
 - ◆ Don't have to rebuild Trilinos to use it!
- Growing support for huge (> 2B unknowns) problems

How Trilinos evolved

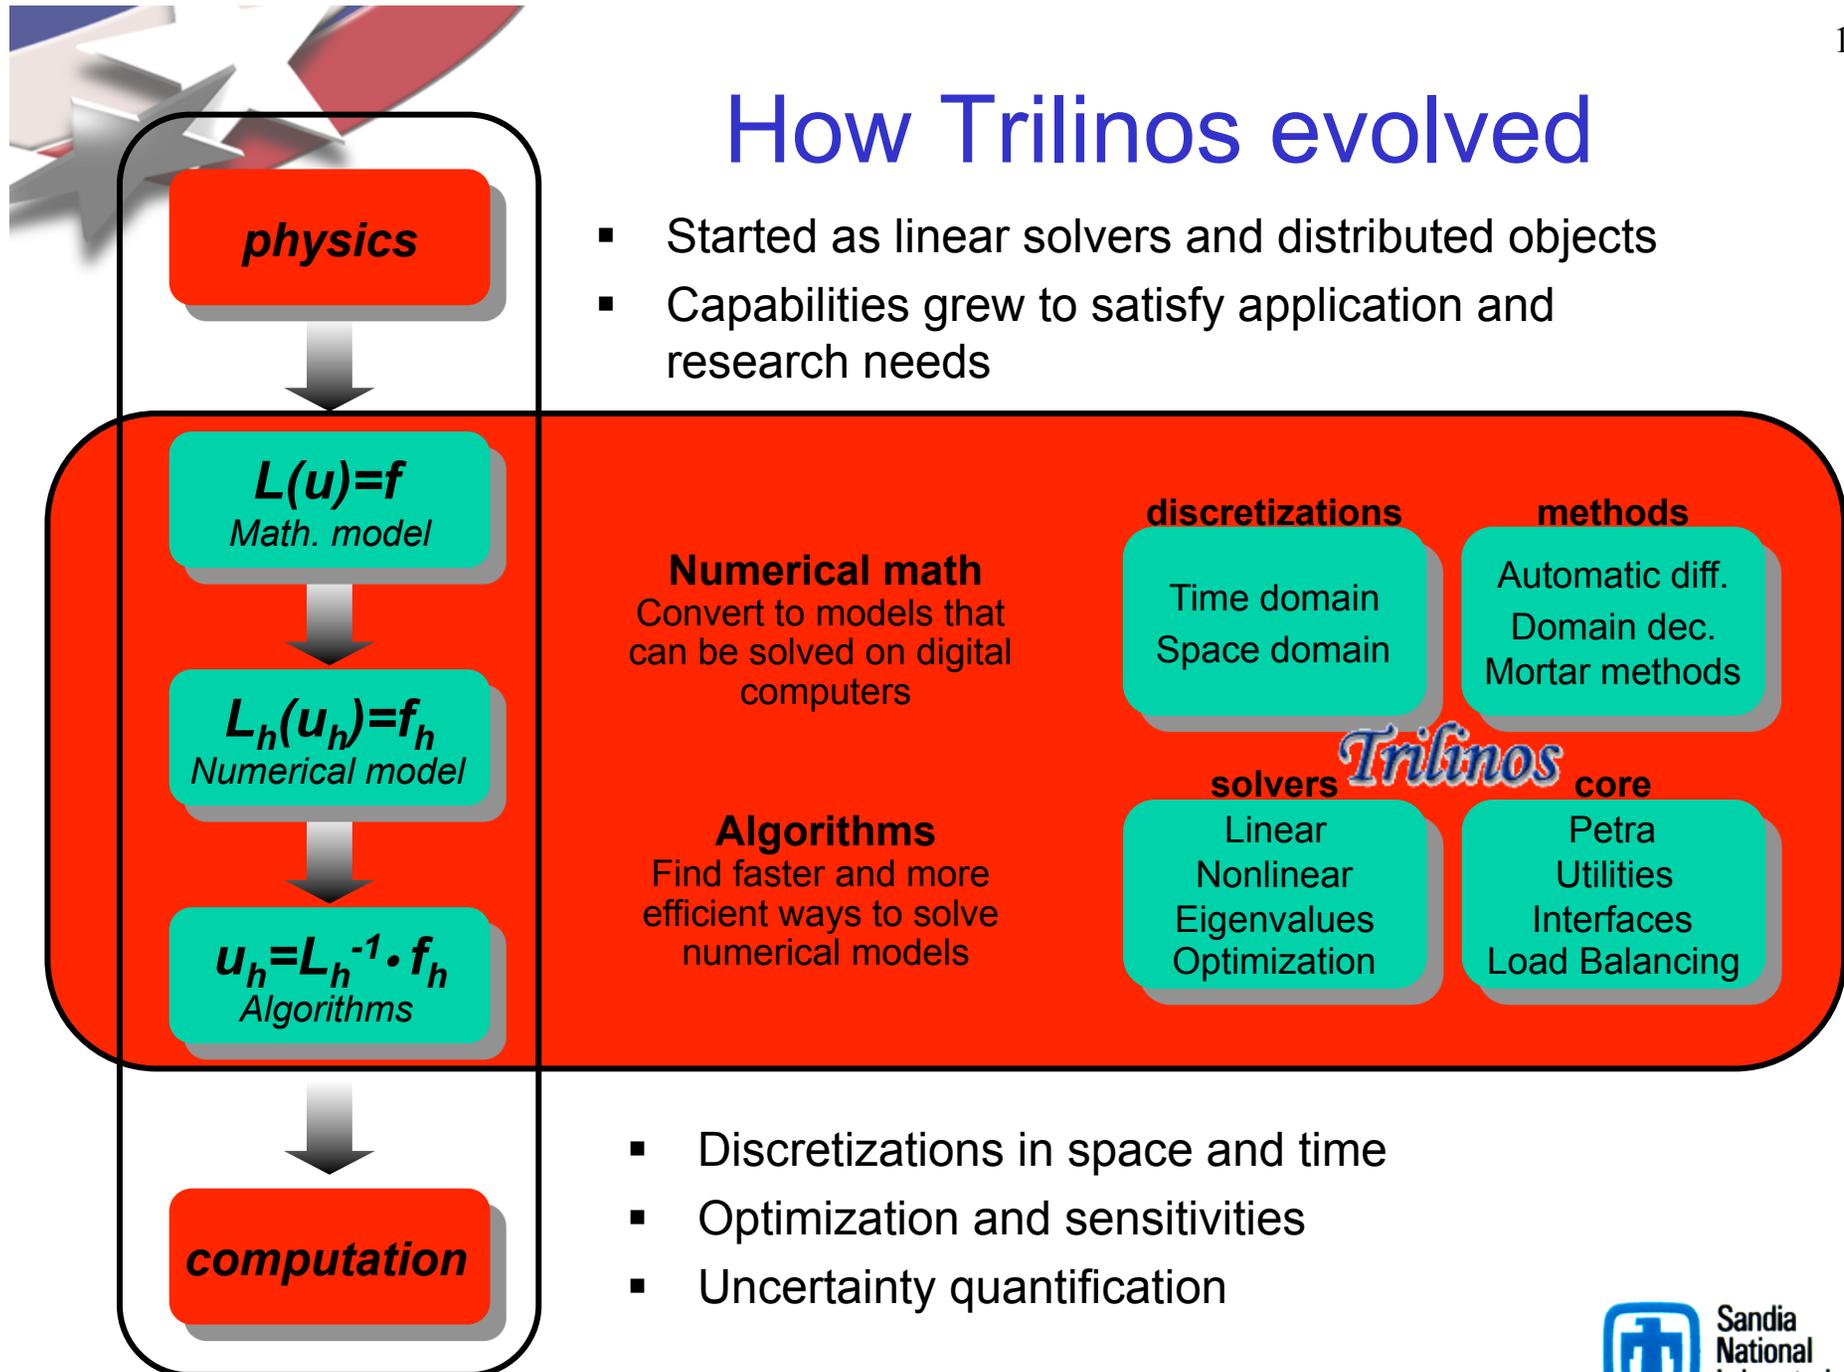

From Forward Analysis, to Support for High-Consequence Decisions

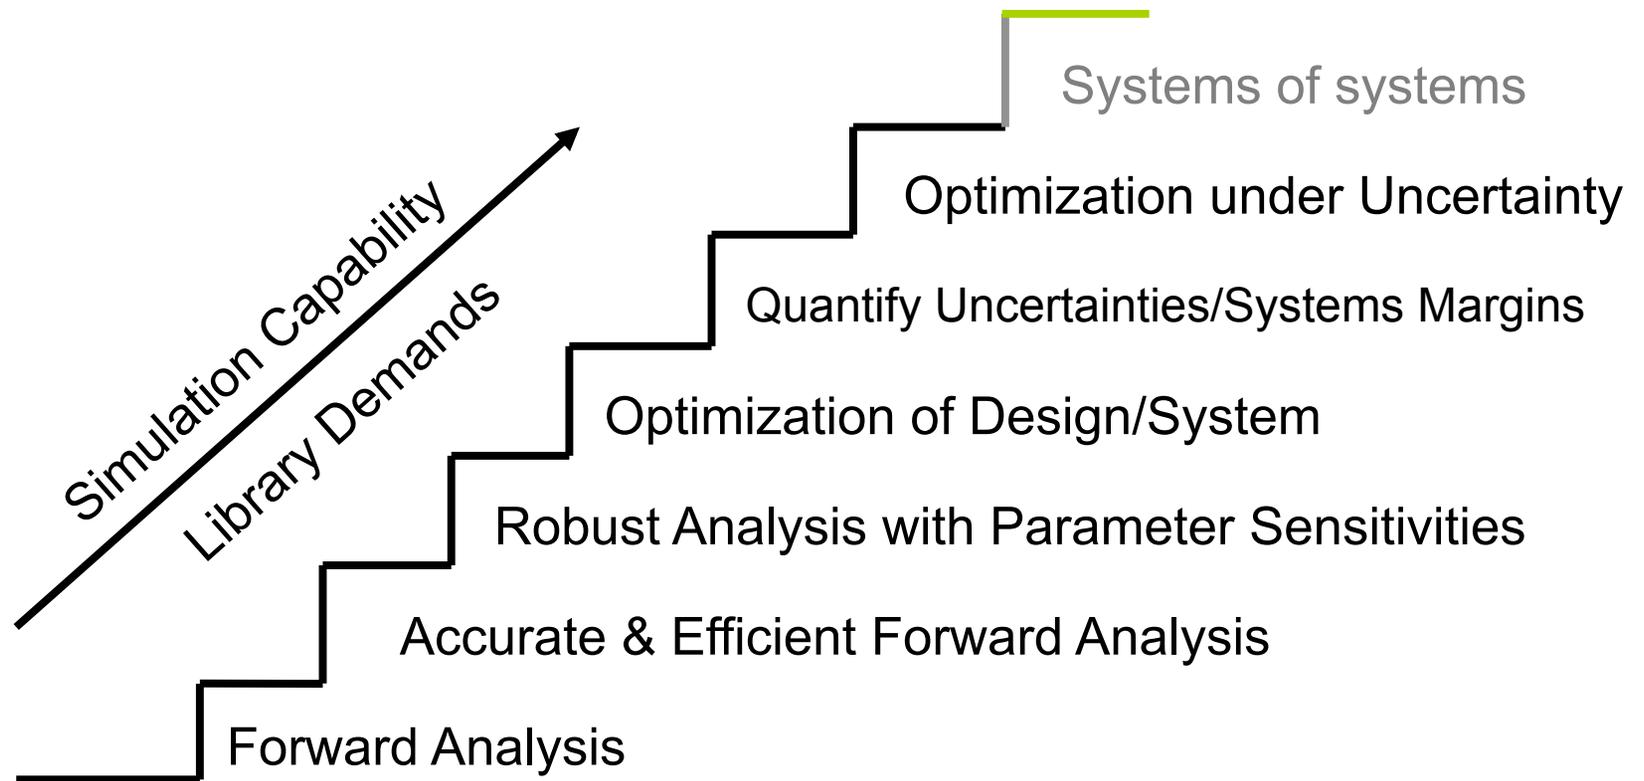

Each stage requires *greater performance and error control* of prior stages:
**Always will need: more accurate and scalable methods.
more sophisticated tools.**

Trilinos strategic goals

- Algorithmic goals
 - ◆ Scalable computations
 - ◆ Hardened computations
 - Fail only if problem intractable
 - Diagnose failures and inform the user
 - ◆ Full vertical coverage
 - Problem construction, solution, analysis, and optimization
- Software goals
 - ◆ Universal interoperability
 - Between any Trilinos components
 - With external software (PETSc, Hypre, ...)
 - ◆ Universal accessibility
 - Programming languages, hardware, operating systems



Trilinos' software organization



Trilinos is made of packages

- Trilinos is not a monolithic piece of software
 - ◆ Like LEGO™ bricks, not Matlab™
- Each package:
 - ◆ Has its own development team and management
 - ◆ Makes its own decisions about algorithms, coding style, etc.
 - ◆ May or may not depend on other Trilinos packages
- Trilinos top layer framework
 - ◆ Not a large amount of source code: ~1.5%
 - ◆ Manages package dependencies
 - Like a GNU/Linux package manager
 - ◆ Runs packages' tests nightly, and on every check-in
- Trilinos is not “indivisible”
 - ◆ You don't need all of Trilinos to get things done
 - ◆ Any subset of packages can be combined and distributed
 - ◆ Current public release contains ~50 of the 55+ Trilinos packages



Interoperability vs. Dependence

(“Can Use”)

(“Depends On”)

- Packages have minimal required dependencies...
- But interoperability makes them useful:
 - ◆ NOX (nonlinear solver) needs linear solvers
 - Can use any of {AztecOO, Belos, LAPACK, ...}
 - ◆ Belos (linear solver) needs preconditioners, matrices, and vectors
 - Matrices and vectors: any of {Epetra, Tpetra, Thyra, ..., PETSc}
 - Preconditioners: any of {IFPACK, ML, Teko, ...}
- Interoperability is enabled at configure time
 - ◆ Each package declares its list of interoperable packages
 - ◆ Trilinos' CMake system automatically hooks them together
- Supports simultaneous “multifrontal” development

Capability areas and leaders

- Capability areas:
 - ◆ Framework, Tools & Interfaces (Jim Willenbring)
 - ◆ Software Engineering Technologies and Integration (Ross Bartlett)
 - ◆ Discretizations (Pavel Bochev)
 - ◆ Geometry, Meshing & Load Balancing (Karen Devine)
 - ◆ Scalable Linear Algebra (Mike Heroux)
 - ◆ Linear & Eigen Solvers (Jonathan Hu)
 - ◆ Nonlinear, Transient & Optimization Solvers (Andy Salinger)
 - ◆ Scalable I/O: (Ron Oldfield)
- Each area includes one or more Trilinos packages
- Each leader provides strategic direction within area



Whirlwind Tour of Packages



Full Vertical Solver Coverage



<p>Optimization Unconstrained: Constrained:</p>	<p>Find $u \in \mathbb{R}^n$ that minimizes $g(u)$ Find $x \in \mathbb{R}^m$ and $u \in \mathbb{R}^n$ that minimizes $g(x, u)$ s.t. $f(x, u) = 0$</p>	<p>Sensitivities (Automatic Differentiation: Sacado)</p>	<p>MOOCHO</p>
<p>Bifurcation Analysis</p>	<p>Given nonlinear operator $F(x, u) \in \mathbb{R}^{n+m}$ For $F(x, u) = 0$ find space $u \in U \ni \frac{\partial F}{\partial x}$</p>		<p>LOCA</p>
<p>Transient Problems DAEs/ODEs:</p>	<p>Solve $f(\dot{x}(t), x(t), t) = 0$ $t \in [0, T], x(0) = x_0, \dot{x}(0) = x'_0$ for $x(t) \in \mathbb{R}^n, t \in [0, T]$</p>		<p>Rythmos</p>
<p>Nonlinear Problems</p>	<p>Given nonlinear operator $F(x) \in \mathbb{R}^m \rightarrow \mathbb{R}^m$ Solve $F(x) = 0 \quad x \in \mathbb{R}^n$</p>		<p>NOX</p>
<p>Linear Problems Linear Equations: Eigen Problems:</p>	<p>Given Linear Ops (Matrices) $A, B \in \mathbb{R}^{m \times n}$ Solve $Ax = b$ for $x \in \mathbb{R}^n$ Solve $A\nu = \lambda B\nu$ for (all) $\nu \in \mathbb{R}^n, \lambda \in \mathbb{R}$</p>		<p>AztecOO Belos Ifpack, ML, etc... Anasazi</p>
<p>Distributed Linear Algebra Matrix/Graph Equations: Vector Problems:</p>	<p>Compute $y = Ax; A = A(G); A \in \mathbb{R}^{m \times n}, G \in \mathfrak{S}^{m \times n}$ Compute $y = \alpha x + \beta w; \alpha = \langle x, y \rangle; x, y \in \mathbb{R}^n$</p>		<p>Epetra Tpetra Kokkos</p>

Trilinos Package Summary

	Objective	Package(s)
Discretizations	Meshing & Discretizations	STKMesh, Intrepid, Pamgen, Sundance, ITAPS, Mesquite
	Time Integration	Rythmos
Methods	Automatic Differentiation	Sacado
	Mortar Methods	Moertel
Services	Linear algebra objects	Epetra, Tpetra, Kokkos
	Interfaces	Thyra, Stratimikos, RTOp, FEI, Shards, Tpetra::RTI
	Load Balancing	Zoltan, Isorropia
	“Skins”	PyTrilinos, WebTrilinos, ForTrilinos, Ctrilinos, Optika
	C++ utilities, I/O, thread API	Teuchos, EpetraExt, Kokkos, Triutils, ThreadPool, Phalanx
Solvers	Iterative linear solvers	AztecOO, Belos, Komplex
	Direct sparse linear solvers	Amesos, Amesos2
	Direct dense linear solvers	Epetra, Teuchos, Pliris
	Iterative eigenvalue solvers	Anasazi
	ILU-type preconditioners	AztecOO, IFPACK, Ifpack2
	Multilevel preconditioners	ML, CLAPS
	Block preconditioners	Meros, Teko
	Nonlinear system solvers	NOX, LOCA
	Optimization (SAND)	MOOCHO, Aristos, TriKota, Globipack, Optipack
	Stochastic PDEs	Stokhos



Whirlwind Tour of Packages

Core Utilities

Discretizations

Methods

Solvers




Intrepid

*Interoperable Tools for Rapid Development
of Compatible Discretizations*

Intrepid offers an **innovative software design** for compatible discretizations:

- allows access to FEM, FV and FD methods using a common API
- supports **hybrid discretizations** (FEM, FV and FD) on unstructured grids
- supports a variety of cell shapes:
 - standard shapes (e.g. tets, hexes): high-order finite element methods
 - arbitrary (polyhedral) shapes: low-order mimetic finite difference methods
- enables optimization, error estimation, V&V, and UQ using fast invasive techniques (direct support for cell-based derivative computations or via automatic differentiation)

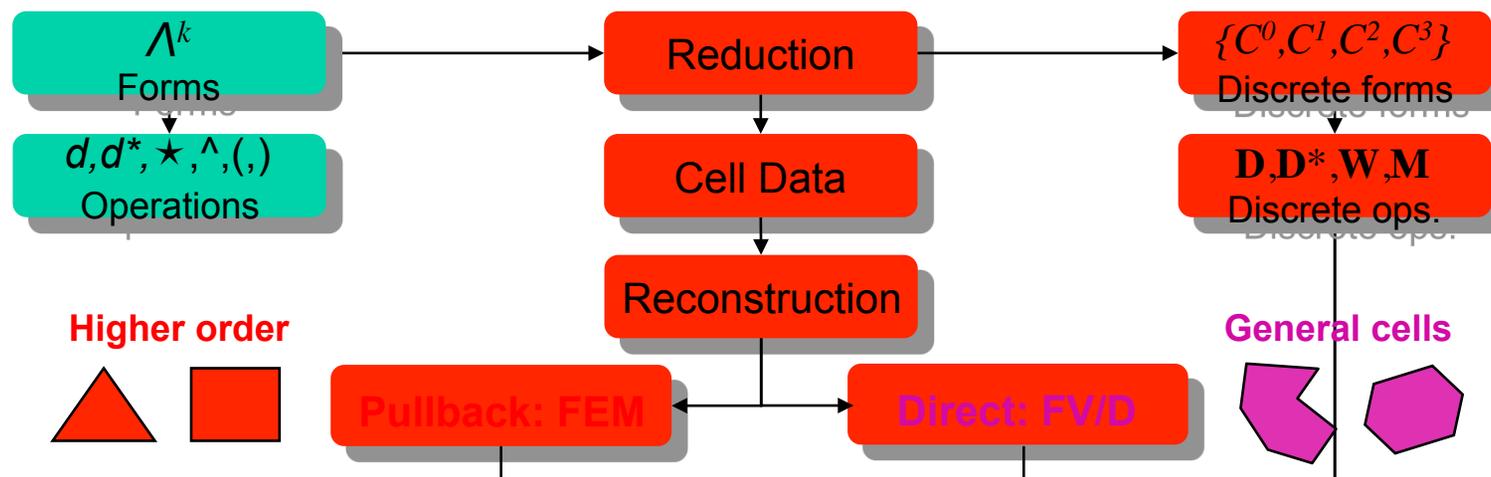

Developers: Pavel Bochev and Denis Ridzal



Rythmos

- Suite of time integration (discretization) methods
- Currently includes:
 - Backward and Forward Euler
 - Explicit Runge-Kutta
 - Implicit BDF at this time.
- Native support for operator splitting methods
- Highly modular
- Forward sensitivities included in first release
- Adjoint sensitivities coming soon

Developers: Todd Coffey, Roscoe Bartlett



Whirlwind Tour of Packages

Discretizations

Methods

Core

Solvers



Sacado: Automatic Differentiation

- Efficient OO based AD tools optimized for element-level computations
- Applies AD at “element”-level computation
 - ◆ “Element” means finite element, finite volume, network device,...
- Template application’s element-computation code
 - ◆ Developers only need to maintain one templated code base
- Provides three forms of AD
 - ◆ Forward Mode: $(x, V) \rightarrow \left(f, \frac{\partial f}{\partial x} V\right)$
 - Propagate derivatives of intermediate variables w.r.t. independent variables forward
 - Directional derivatives, tangent vectors, square Jacobians, $\partial f / \partial x$ when $m \geq n$.
 - ◆ Reverse Mode: $(x, W) \rightarrow \left(f, W^T \frac{\partial f}{\partial x}\right)$
 - Propagate derivatives of dependent variables w.r.t. intermediate variables backwards
 - Gradients, Jacobian-transpose products (adjoints), $\partial f / \partial x$ when $n > m$.
 - ◆ Taylor polynomial mode: $x(t) = \sum_{k=0}^d x_k t^k \rightarrow \sum_{k=0}^d f_k t^k = f(x(t)) + O(t^{d+1}), f_k = \frac{1}{k!} \frac{d^k}{dt^k} f(x(t))$
 - ◆ Basic modes combined for higher derivatives.

Developers: Eric Phipps, David Gay



Whirlwind Tour of Packages

Discretizations

Methods

Core


Solvers

The logo graphic for Teuchos, featuring a stylized white star with a red and blue gradient, set against a white background with a red and blue gradient.

Teuchos

- Portable utility package of commonly useful tools:
 - ◆ ParameterList class: key/value pair database, recursive capabilities.
 - ◆ LAPACK, BLAS wrappers (templated on ordinal and scalar type).
 - ◆ Dense matrix and vector classes (compatible with BLAS/LAPACK).
 - ◆ FLOP counters, timers.
 - ◆ Ordinal, Scalar Traits support: Definition of 'zero', 'one', etc.
 - ◆ Reference counted pointers / arrays, and more...
- Takes advantage of advanced features of C++:
 - ◆ Templates
 - ◆ Standard Template Library (STL)
- Teuchos::ParameterList:
 - ◆ Allows easy control of solver parameters.
 - ◆ XML format input/output.

**Developers: Roscoe Barlett, Kevin Long, Heidi Thornquist, Mike Heroux,
Paul Sexton, Kris Kampshoff, Chris Baker**

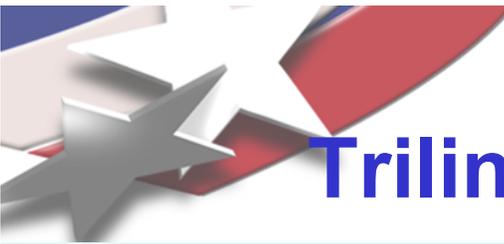

Trilinos Common Language: Petra

- Petra provides a “common language” for distributed linear algebra objects (operator, matrix, vector)

- Petra¹ provides distributed matrix and vector services.
- Exists in basic form as an object model:
 - ◆ Describes basic user and support classes in UML, independent of language/implementation.
 - ◆ Describes objects and relationships to build and use matrices, vectors and graphs.
 - ◆ Has 2 implementations under active development.

¹Petra is Greek for “foundation”.



Petra Implementations

- Epetra (Essential Petra):
 - ◆ Current production version
 - ◆ Uses stable core subset of C++ (circa 2000)
 - ◆ Restricted to real, double precision arithmetic
 - ◆ Interfaces accessible to C and Fortran users
- Tpetra (Templated Petra):
 - ◆ Next-generation version
 - ◆ Needs a modern C++ compiler (but not C++0x)
 - ◆ Supports arbitrary scalar and index types via templates
 - Arbitrary- and mixed-precision arithmetic
 - 64-bit indices for solving problems with >2 billion unknowns
 - ◆ Hybrid MPI / shared-memory parallel
 - Supports multicore CPU and hybrid CPU/GPU
 - Built on Kokkos manycore node library



Developers: Chris Baker, Mike Heroux, Rob Hoekstra, Alan Williams

Zoltan

■ Data Services for Dynamic Applications

- ◆ Dynamic load balancing
- ◆ Graph coloring
- ◆ Data migration
- ◆ Matrix ordering

■ Partitioners:








Geometric (coordinate-based) methods:

- Recursive Coordinate Bisection (Berger, Bokhari)
- Recursive Inertial Bisection (Taylor, Nour-Omid)
- Space Filling Curves (Peano, Hilbert)
- Refinement-tree Partitioning (Mitchell)

Hypergraph and graph (connectivity-based) methods:

- Hypergraph Repartitioning PaToH (Catalyurek)
- Zoltan Hypergraph Partitioning
- ParMETIS (U. Minnesota)
- Jostle (U. Greenwich)

Isorropia package: interface to Epetra objects

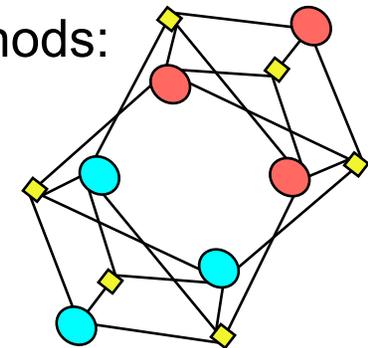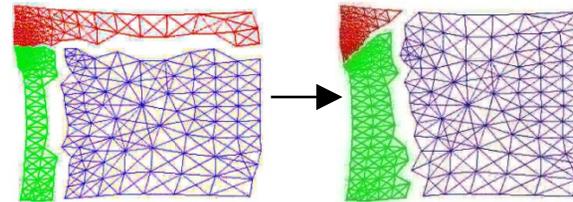

Developers: Karen Devine, Eric Boman, Robert Heaphy



Thyra

- High-performance, abstract interfaces for linear algebra
- Offers flexibility through abstractions to algorithm developers
- Linear solvers (Direct, Iterative, Preconditioners)
 - ◆ Abstraction of basic vector/matrix operations (dot, axpy, mv).
 - ◆ Can use any concrete linear algebra library (Epetra, PETSc, BLAS).
- Nonlinear solvers (Newton, etc.)
 - ◆ Abstraction of linear solve (solve $Ax=b$).
 - ◆ Can use any concrete linear solver library:
 - AztecOO, Belos, ML, PETSc, LAPACK
- Transient/DAE solvers (implicit)
 - ◆ Abstraction of nonlinear solve.
 - ◆ ... and so on.

Developers: Roscoe Bartlett, Kevin Long



“Skins”

- PyTrilinos provides Python access to Trilinos packages
- Uses SWIG to generate bindings.
- Epetra, AztecOO, IFPACK, ML, NOX, LOCA, Amesos and NewPackage are supported.

Developer: Bill Spatz

- CTrilinos: C wrapper (mostly to support ForTrilinos).
- ForTrilinos: OO Fortran interfaces.

Developers: Nicole Lemaster, Damian Rouson

- WebTrilinos: Web interface to Trilinos
- Generate test problems or read from file.
- Generate C++ or Python code fragments and click-run.
- Hand modify code fragments and re-run.
- **Will use during hands-on.**

Developers: Ray Tuminaro, Jonathan Hu, Marzio Sala, Jim Willenbring



Whirlwind Tour of Packages

Discretizations

Methods

Core

Solvers



Amesos

- Interface to direct solvers for distributed sparse linear systems (KLU, UMFPACK, SuperLU, MUMPS, ScaLAPACK)

- Challenges:
 - ◆ No single solver dominates
 - ◆ Different interfaces and data formats, serial and parallel
 - ◆ Interface often changes between revisions

- Amesos offers:
 - ◆ A single, clear, consistent interface, to various packages
 - ◆ Common look-and-feel for all classes
 - ◆ Separation from specific solver details
 - ◆ Use serial and distributed solvers; Amesos takes care of data redistribution
 - ◆ Native solvers: KLU and Paraklete

Developers: Ken Stanley, Marzio Sala, Tim Davis




Amesos2

- Second-generation sparse direct solvers package
- Unified interface to multiple solvers, just like Amesos
- Amesos2 features:
 - ◆ Supports matrices of arbitrary scalar and index types
 - ◆ Path to multicore CPU and hybrid CPU/GPU solvers
 - ◆ Thread safe: multiple solvers can coexist on the same node
 - Supports new intranode hybrid direct / iterative solver ShyLU
 - ◆ Abstraction from specific sparse matrix representation
 - Supports Epetra and Tpetra
 - Extensible to other matrix types
- September 2011 release

Developers: Eric Bavier, Erik Boman, and Siva Rajamanickam

AztecOO

- Krylov subspace solvers: CG, GMRES, Bi-CGSTAB,...
- Incomplete factorization preconditioners
- Aztec is the workhorse solver at Sandia:
 - ◆ Extracted from the MPSalsa reacting flow code.
 - ◆ Installed in dozens of Sandia apps.
 - ◆ 1900+ external licenses.
- AztecOO improves on Aztec by:
 - ◆ Using Epetra objects for defining matrix and RHS.
 - ◆ Providing more preconditioners/scalings.
 - ◆ Using C++ class design to enable more sophisticated use.
- AztecOO interfaces allows:
 - ◆ Continued use of Aztec for functionality.
 - ◆ Introduction of new solver capabilities outside of Aztec.

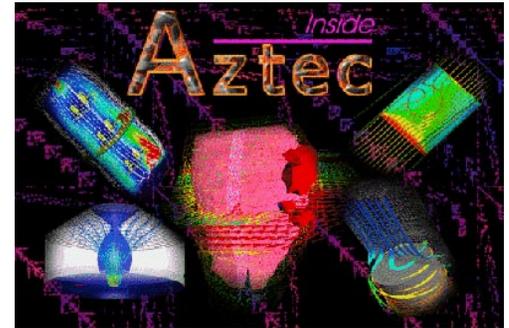

Developers: Mike Heroux, Alan Williams, Ray Tuminaro



Belos

- Next-generation linear solver library, written in templated C++.
- Generic framework for developing iterative algorithms
- Algorithm implementation via traits classes and abstract base classes:
 - ♦ Operator-vector products: `Belos::MultiVecTraits`, `Belos::OperatorTraits`
 - ♦ Orthogonalization: `Belos::OrthoManager`, `Belos::MatOrthoManager`
 - ♦ Status tests: `Belos::StatusTest`, `Belos::StatusTestResNorm`
 - ♦ Iteration kernels: `Belos::Iteration`
 - ♦ Linear solver managers: `Belos::SolverManager`
- AztecOO provides solvers for $Ax=b$, what about solvers for:
 - ♦ Simultaneously solved systems w/ multiple-RHS: $AX = B$
 - ♦ Sequentially solved systems w/ multiple-RHS: $AX_i = B_i, i=1, \dots, t$
 - ♦ Sequences of multiple-RHS systems: $A_i X_i = B_i, i=1, \dots, t$
- Many advanced methods for these types of linear systems
 - ♦ Block methods: block GMRES [Vital], block CG/BICG [O'Leary]
 - ♦ "Seed" solvers: hybrid GMRES [Nachtigal, et al.]
 - ♦ Recycling solvers: recycled Krylov methods [Parks, et al.]
 - ♦ Restarting techniques, orthogonalization techniques, ...

**Developers: Heidi Thornquist, Mike Heroux, Mark Hoemmen,
Mike Parks, Rich Lehoucq**



IFPACK: Algebraic Preconditioners

- Overlapping Schwarz preconditioners with incomplete factorizations, block relaxations, & block direct solves.
- Accepts user matrix via abstract matrix interface
- Uses Epetra for basic matrix/vector calculations
- Simple perturbation stabilizations and condition est.
- Can be used by NOX, ML, AztecOO, Belos, ...

Developers: Marzio Sala, Mike Heroux, Siva Rajamanickam, Alan Williams



Ifpack2

- Second generation Ifpack.
- Ifpack2 offers:
 - ◆ Template support.
 - ◆ Improved internal structure.
 - ◆ Path to threaded and hybrid solvers.
 - ◆ Separation from specific solver details

Developers: Mike Heroux, Siva Rajamanickam, Alan Williams, Michael Wolf



: Multi-level Preconditioners

- Smoothed aggregation, multigrid and domain decomposition preconditioning package
- Critical technology for scalable performance of many apps
- ML compatible with other Trilinos packages:
 - ◆ Accepts user data as Epetra_RowMatrix object (abstract interface). Any implementation of Epetra_RowMatrix works.
 - ◆ Implements the Epetra_Operator interface. Allows ML preconditioners to be used with AztecOO, Belos, Anasazi.
- Can also be used independent of other Trilinos packages

Developers: Ray Tuminaro, Jeremie Gaidamour, Jonathan Hu, Marzio Sala, Chris Siefert



Anasazi

- Next-generation eigensolver library, written in templated C++.
- Provide a generic framework for developing iterative algorithms for solving large-scale eigenproblems.
- Algorithm implementation is accomplished through the use of traits classes and abstract base classes:
 - ♦ Operator-vector products: `Anasazi::MultiVecTraits`, `Anasazi::OperatorTraits`
 - ♦ Orthogonalization: `Anasazi::OrthoManager`, `Anasazi::MatOrthoManager`
 - ♦ Status tests: `Anasazi::StatusTest`, `Anasazi::StatusTestResNorm`
 - ♦ Iteration kernels: `Anasazi::EigenSolver`
 - ♦ Eigensolver managers: `Anasazi::SolverManager`
 - ♦ Eigenproblem: `Anasazi::EigenProblem`
 - ♦ Sort managers: `Anasazi::SortManager`
- Currently has solver managers for three eigensolvers:
 - ♦ Block Krylov-Schur
 - ♦ Block Davidson
 - ♦ LOBPCG
- Can solve:
 - ♦ standard and generalized eigenproblems
 - ♦ Hermitian and non-Hermitian eigenproblems
 - ♦ real or complex-valued eigenproblems


**Developers: Heidi Thornquist, Mike Heroux, Chris Baker,
Rich Lehoucq, Ulrich Hetmaniuk**

NOX: Nonlinear Solvers

- Suite of nonlinear solution methods

Broyden's Method

$$M_B = f(x_c) + B_c d$$

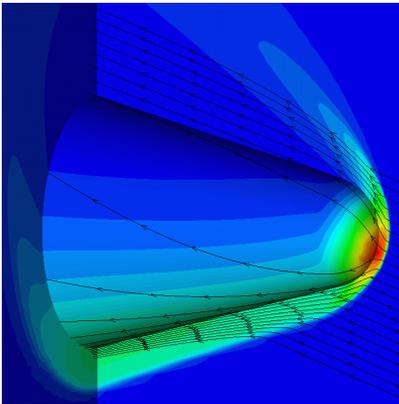

Newton's Method

$$M_N = f(x_c) + J_c d$$




Globalizations

Line Search

Interval Halving
Quadratic
Cubic
More'-Thuente


Trust Region

Dogleg
Inexact Dogleg

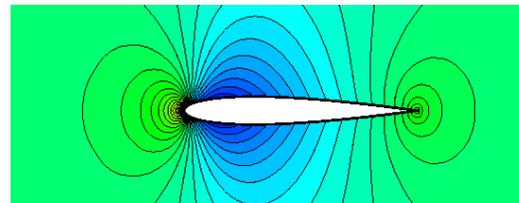

Tensor Method

$$M_T = f(x_c) + J_c d + \frac{1}{2} T_c d d$$

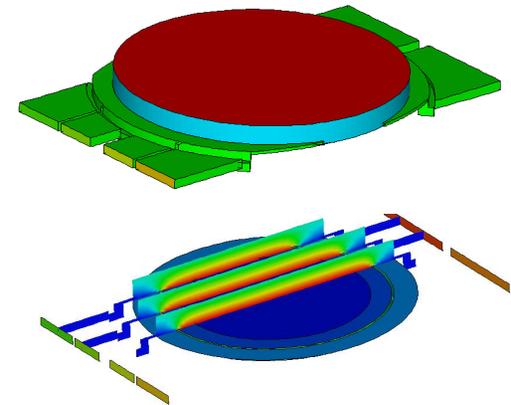

Jacobian Estimation

- Graph Coloring
- Finite Difference
- Jacobian-Free Newton-Krylov

<http://trilinos.sandia.gov/packages/nox>

Developers: Tammy Kolda, Roger Pawlowski

Implementation

- Parallel
- OO-C++
- Independent of the linear algebra package!



LOCA

- Library of continuation algorithms

- Provides
 - ◆ Zero order continuation
 - ◆ First order continuation
 - ◆ Arc length continuation
 - ◆ Multi-parameter continuation (via Henderson's MF Library)
 - ◆ Turning point continuation
 - ◆ Pitchfork bifurcation continuation
 - ◆ Hopf bifurcation continuation
 - ◆ Phase transition continuation
 - ◆ Eigenvalue approximation (via ARPACK or Anasazi)

Developers: Andy Salinger, Eric Phipps



MOOCHO & Aristos

- MOOCHO: Multifunctional Object-Oriented arCHitecture for Optimization
 - ◆ Large-scale invasive simultaneous analysis and design (SAND) using reduced space SQP methods.

Developer: Roscoe Bartlett

- Aristos: Optimization of large-scale design spaces
 - ◆ Invasive optimization approach based on full-space SQP methods.
 - ◆ Efficiently manages inexactness in the inner linear system solves.

Developer: Denis Ridzal



**Solver collaborations:
Abstract interfaces
and applications**



Trilinos Strategic Goals

- **Scalable Computations:** As problem size and processor counts increase, the cost of the computation will remain nearly fixed.
- **Hardened Computations:** Never fail unless problem essentially intractable, in which case we diagnose and inform the user why the problem fails and provide a reliable measure of error.
- **Full Vertical Coverage:** Provide leading edge enabling technologies through the entire technical application software stack: from problem construction, solution, analysis and optimization.
- **Grand Universal Interoperability:** All Trilinos **packages**, and important external packages, will be interoperable, so that any combination of packages and external software (e.g., PETSc, Hypra) that makes sense algorithmically will be **possible** within Trilinos.
- **Universal Accessibility:** All Trilinos capabilities will be available to users of major computing environments: C++, Fortran, Python and the Web, and from the desktop to the latest scalable systems.
- **Universal Solver RAS:** Trilinos will be:
 - **Reliable:** Leading edge hardened, scalable solutions for each of these applications
 - **Available:** Integrated into every major application at Sandia
 - **Serviceable:** Easy to maintain and upgrade within the application environment.

Algorithmic
Goals

Software
Goals

Categories of Abstract Problems and Abstract Algorithms

Trilinos Packages

- Linear Problems: Given linear operator (matrix) $A \in \mathbf{R}^{n \times n}$
 - Linear equations: Solve $Ax = b$ for $x \in \mathbf{R}^n$ **Belos**
 - Eigen problems: Solve $Av = \lambda v$ for (all) $v \in \mathbf{R}^n$ and $\lambda \in \mathbf{R}$ **Anasazi**

- Nonlinear Problems: Given nonlinear operator $c(x, u) \in \mathbf{R}^{n+m} \rightarrow \mathbf{R}^n$
 - Nonlinear equations: Solve $c(x) = 0$ for $x \in \mathbf{R}^n$ **NOX**
 - Stability analysis: For $c(x, u) = 0$ find space $u \in \mathcal{U}$ such that $\frac{\partial c}{\partial x}$ is singular **LOCA**

- Transient Nonlinear Problems:
 - DAEs/ODEs: Solve $f(\dot{x}(t), x(t), t) = 0, t \in [0, T], x(0) = x_0, \dot{x}(0) = x'_0$
for $x(t) \in \mathbf{R}^n, t \in [0, T]$ **Rythmos**

- Optimization Problems:
 - Unconstrained: Find $u \in \mathbf{R}^n$ that minimizes $f(u)$ **MOOCHO**
 - Constrained: Find $y \in \mathbf{R}^m$ and $u \in \mathbf{R}^n$ that:
minimizes $f(y, u)$
such that $c(y, u) = 0$ **Aristos**

Abstract Numerical Algorithms

An **abstract numerical algorithm** (ANA) is a numerical algorithm that can be expressed solely in terms of vectors, vector spaces, and linear operators

Example Linear ANA (LANA) : Linear Conjugate Gradients

Given:

$A \in \mathcal{X} \rightarrow \mathcal{X}$: s.p.d. linear operator

$b \in \mathcal{X}$: right hand side vector

Find vector $x \in \mathcal{X}$ that solves $Ax = b$

- ANAs can be very mathematically sophisticated!
- ANAs can be extremely reusable!

Linear Conjugate Gradient Algorithm

Types of operations Types of objects

Compute $r^{(0)} = b - Ax^{(0)}$ for the initial guess $x^{(0)}$.

for $i = 1, 2, \dots$

$$\rho_{i-1} = \langle r^{(i-1)}, r^{(i-1)} \rangle$$

$$\beta_{i-1} = \rho_{i-1} / \rho_{i-2} \quad (\beta_0 = 0)$$

$$p^{(i)} = r^{(i-1)} + \beta_{i-1} p^{(i-1)} \quad (p^{(1)} = r^{(1)})$$

$$q^{(i)} = Ap^{(i)}$$

$$\gamma_i = \langle p^{(i)}, q^{(i)} \rangle$$

$$\alpha_i = \rho_{i-1} / \gamma_i$$

$$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$$

$$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$$

check convergence; continue if necessary

end

linear operator applications

vector-vector operations

scalar operations

scalar product $\langle x, y \rangle$ defined by vector space

Linear Operators

- A

Vectors

- r, x, p, q


Scalars

- $\rho, \beta, \gamma, \alpha$

Vector spaces?

- \mathcal{X}

Solver Software Components and Interfaces

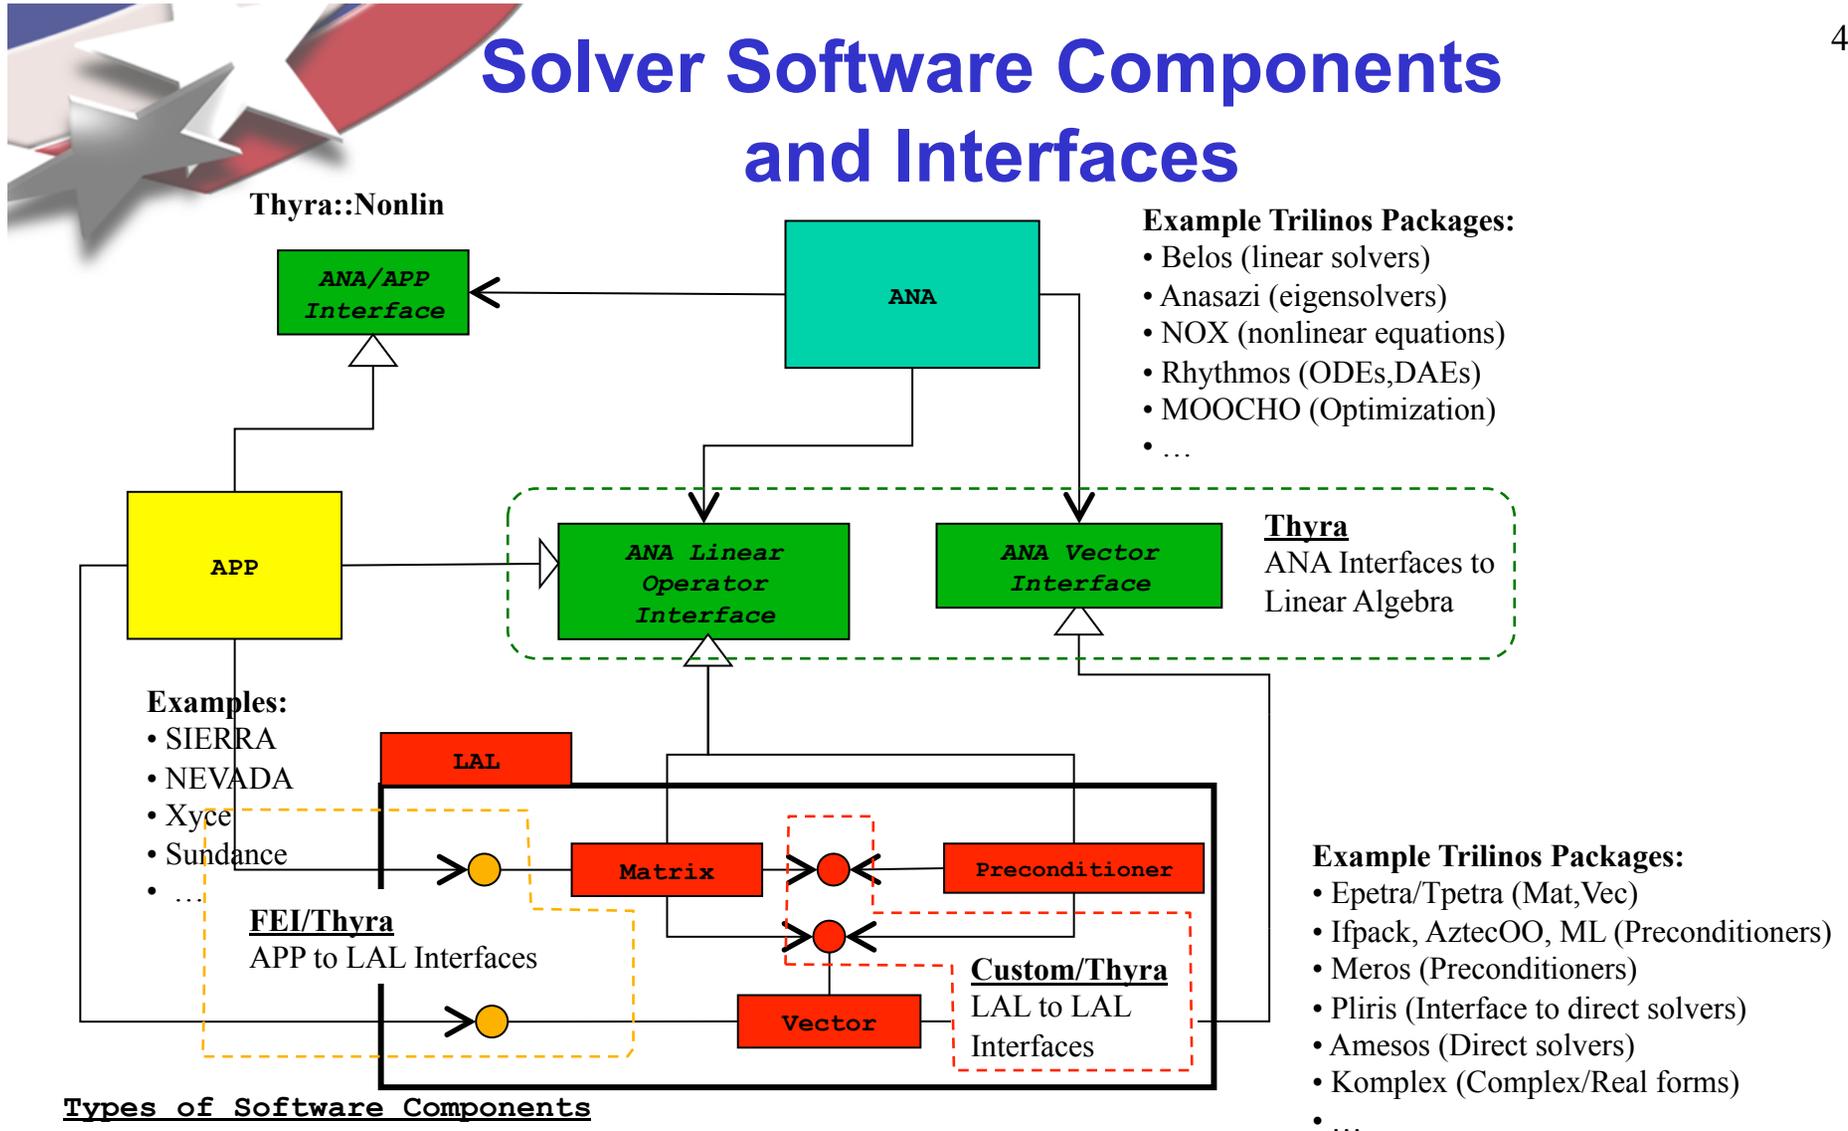

Types of Software Components

- 1) ANA : Abstract Numerical Algorithm (e.g. linear solvers, eigensolvers, nonlinear solvers, stability analysis, uncertainty quantification, transient solvers, optimization etc.)
- 2) LAL : Linear Algebra Library (e.g. vectors, sparse matrices, sparse factorizations, preconditioners)
- 3) APP : Application (the model: physics, discretization method etc.)



Introducing Stratimikos

- **Stratimikos** created Greek words "stratigiki" (strategy) and "grammikos" (linear)
- Defines class **Thyra::DefaultLinearSolverBuilder**.
- Provides common access to:
 - Linear Solvers: **Amesos**, **AztecOO**, **Belos**, ...
 - Preconditioners: **Ipack**, **ML**, ...
- Reads in options through a **parameter list** (read from XML?)
- Accepts any linear system objects that provide
 - **Epetra_Operator / Epetra_RowMatrix** view of the matrix
 - SPMD vector views for the RHS and LHS (e.g. **Epetra_[Multi]Vector** objects)
- Provides **uniform access** to linear solver options that can be leveraged **across multiple applications and algorithms**

Key Point:

- Stratimikos is an important building block for creating more sophisticated linear solver capabilities!



Stratimikos Parameter List and Sublists

```
<ParameterList name="Stratimikos">
  <Parameter name="Linear Solver Type" type="string" value="Aztec00"/>
  <Parameter name="Preconditioner Type" type="string" value="Ifpack"/>
  <ParameterList name="Linear Solver Types">
    <ParameterList name="Amesos">
      <Parameter name="Solver Type" type="string" value="Klu"/>
      <ParameterList name="Amesos Settings">
        <Parameter name="MatrixProperty" type="string" value="general"/>
        ...
      </ParameterList>
      <ParameterList name="Mumps"> ... </ParameterList>
      <ParameterList name="Superludist"> ... </ParameterList>
    </ParameterList>
  </ParameterList>
  <ParameterList name="Aztec00">
    <ParameterList name="Forward Solve">
      <Parameter name="Max Iterations" type="int" value="400"/>
      <Parameter name="Tolerance" type="double" value="1e-06"/>
      <ParameterList name="Aztec00 Settings">
        <Parameter name="Aztec Solver" type="string" value="GMRES"/>
        ...
      </ParameterList>
    </ParameterList>
  </ParameterList>
  ...
  <ParameterList name="Belos"> ... </ParameterList>
</ParameterList>
<ParameterList name="Preconditioner Types">
  <ParameterList name="Ifpack">
    <Parameter name="Prec Type" type="string" value="ILU"/>
    <Parameter name="Overlap" type="int" value="0"/>
    <ParameterList name="Ifpack Settings">
      <Parameter name="fact: level-of-fill" type="int" value="0"/>
      ...
    </ParameterList>
  </ParameterList>
  <ParameterList name="ML"> ... </ParameterList>
</ParameterList>
</ParameterList>
```

Top level parameters

Linear Solvers

**Sublists passed
on to package
code!**

Preconditioners

**Every parameter
and sublist is
handled by Thyra
code and is fully
validated!**



Getting started: “How do I...?”

“How do I...?”

- Build my application with Trilinos?
- Learn about common Trilinos programming idioms?
- Download / find an installation of Trilinos?
- Find documentation and help?

Building your app with Trilinos

If you are using Makefiles:

- Makefile.export system



If you are using CMake:

- CMake FIND_PACKAGE





Export Makefile System

Once Trilinos is built, how do you link against the application?

There are a number of issues:


- Library link order:
 - `-Inoxepetra -Inox -lepetra -lteuchos -lblas -llapack`
- Consistent compilers:
 - `g++`, `mpiCC`, `icc`...
- Consistent build options and package defines:
 - `g++ -g -O3 -D HAVE_MPI -D _STL_CHECKED`

Answer: Export Makefile system



Why Export Makefiles are Important

- Trilinos has LOTS of packages
- As package dependencies (especially optional ones) are introduced, more maintenance is required by the top-level packages:

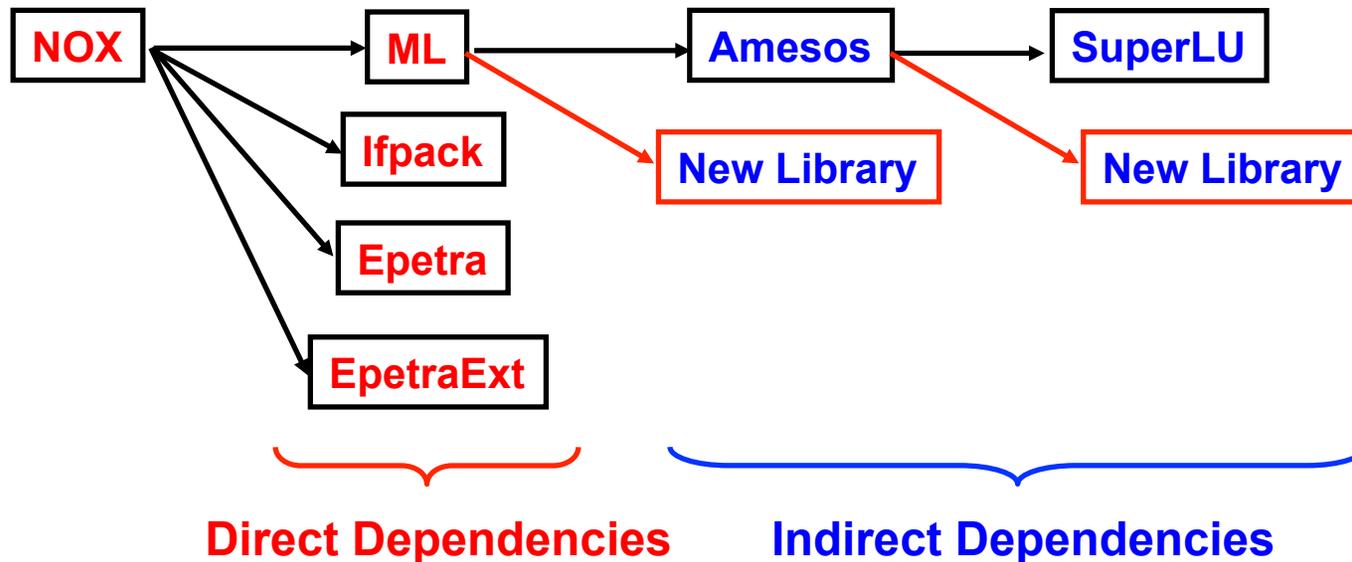

NOX either must:

- Account for the new libraries in its configure script (unscalable)
- Depend on direct dependent packages to supply them through export makefiles.



Export Makefiles in Action

```
#  
# A Makefile that your application can use if you want to build with Epetra.  
#  
# (Excerpt from $(TRILINOS_INSTALL_DIR)/include/Makefile.client.Epetra.)  
#  
  
# Include the Trilinos export Makefile from package=Epetra.  
include $(TRILINOS_INSTALL_DIR)/include/Makefile.export.Epetra  
  
# Add the Trilinos installation directory to the library and header search paths.  
LIB_PATH = $(TRILINOS_INSTALL_DIR)/lib  
INCLUDE_PATH = $(TRILINOS_INSTALL_DIR)/include $(CLIENT_EXTRA_INCLUDES)  
  
# Set the C++ compiler and flags to those specified in the export Makefile.  
# This ensures your application is built with the same compiler and flags  
# with which Trilinos was built.  
CXX = $(EPETRA_CXX_COMPILER)  
CXXFLAGS = $(EPETRA_CXX_FLAGS)  
  
# Add the Trilinos libraries, search path, and rpath to the  
# linker command line arguments  
LIBS = $(CLIENT_EXTRA_LIBS) $(SHARED_LIB_RPATH_COMMAND) \  
$(EPETRA_LIBRARIES) \  
$(EPETRA_TPL_LIBRARIES) \  
$(EPETRA_EXTRA_LD_FLAGS)  
  
#  
# Rules for building executables and objects.  
#  
%.exe : %.o $(EXTRA_OBJS)  
$(CXX) -o $@ $(LDFLAGS) $(CXXFLAGS) $< $(EXTRA_OBJS) -L$(LIB_PATH) $(LIBS)  
  
%.o : %.cpp  
$(CXX) -c -o $@ $(CXXFLAGS) -I$(INCLUDE_PATH) $(EPETRA_TPL_INCLUDES) $<
```

Using CMake to build with Trilinos

- CMake: Cross-platform build system
 - ◆ Similar function as the GNU Autotools
- Trilinos uses CMake to build
- You don't have to use CMake to build with Trilinos
- But if you do:
 - ◆ `FIND_PACKAGE(Trilinos ...)`
 - ◆ Example CMake script in hands-on demo





Software interface idioms

Idioms: Common “look and feel”

- Lower-level programming idioms
 - ◆ Provided by the Teuchos utilities package
 - ◆ Hierarchical “input deck” (ParameterList)
 - ◆ Memory management classes (RCP, ArrayRCP)
 - Safety: Manage data ownership and sharing
 - Performance: Avoid copies, control memory placement
 - ◆ Performance counters (e.g., TimeMonitor)
- Higher-level algorithmic idioms
 - ◆ Petra distributed object model
 - Provided by Epetra and Tpetra
 - Common “language” shared by many packages

ParameterList: Trilinos' "input deck"

- Simple key/value pair database, but nest-able
 - ◆ Naturally hierarchical, just like numerical algorithms or software
 - ◆ Communication protocol between application layers
- Reproducible runs: save to XML, restore configuration
- Can express constraints and dependencies
- Optional GUI (Optika): lets novice users run your app

```
 Teuchos::ParameterList p;  
 p.set("Solver", "GMRES");  
 p.set("Tolerance", 1.0e-4);  
 p.set("Max Iterations", 100);
```

```
 Teuchos::ParameterList& lsParams = p.sublist("Solver Options");  
 lsParams.set("Fill Factor", 1);
```

```
 double tol = p.get<double>("Tolerance");  
 int fill = p.sublist("Solver Options").get<int>("Fill Factor");
```

Memory management classes

- Scientific computation: Lots of data, big objects
 - ◆ Avoid copying and share data whenever possible
 - ◆ Who “owns” (deallocates) the data?
- Manual memory management (void*) not an option
 - ◆ Results in buggy and / or conservative code
- Reference-counted pointers and arrays
 - ◆ RCP resp. ArrayRCP
 - ◆ You don't have to deallocate memory explicitly
 - ◆ Objects deallocated when nothing points to them anymore
- Important for multicore CPU and hybrid CPU/GPU!
 - ◆ Custom (de)allocators for GPU device memory
 - ◆ Avoid unnecessary data movement, preserve locality
 - CPU – GPU data transfers are expensive
 - Important for multicore CPU too (e.g., NUMA)



Teuchos::RCP Technical Report

SAND REPORT

SAND2004-3268
Unlimited Release
Printed June 2004

SAND2007-4078

Teuchos::RCP Beginner's Guide

An Introduction to the Trilinos Smart Reference-Counted Pointer Class for (Almost) Automatic Dynamic Memory Management in C++

Roscoe A. Bartlett
Optimization and Uncertainty Estimation

Prepared by
Sandia National Laboratories
Albuquerque, New Mexico 87185 and Livermore, California 94550

Sandia is a multiprogram laboratory operated by Sandia Corporation,
a Lockheed Martin Company, for the United States Department of Energy's
National Nuclear Security Administration under Contract DE-AC04-94-AL55000.

Approved for public release; further dissemination unlimited.



<http://trilinos.sandia.gov/documentation.html>

Trilinos/doc/RCPbeginnersGuide



TimeMonitor

- Timers that keep track of:
 - ◆ Runtime
 - ◆ Number of calls
- Time object associates a string name to the timer:


```
RCP<Time> fillTimer =  
    TimeMonitor::getNewCounter("Fill Time");
```
- When TimeMonitor is created, the timer starts:

```
TimeMonitor tm (*fillTimer);
```
- Timer stopped when you leave the TimeMonitor's scope
- Automatically takes care of recursive / nested calls



Petra Distributed Object Model

Typical Petra Object Construction Sequence

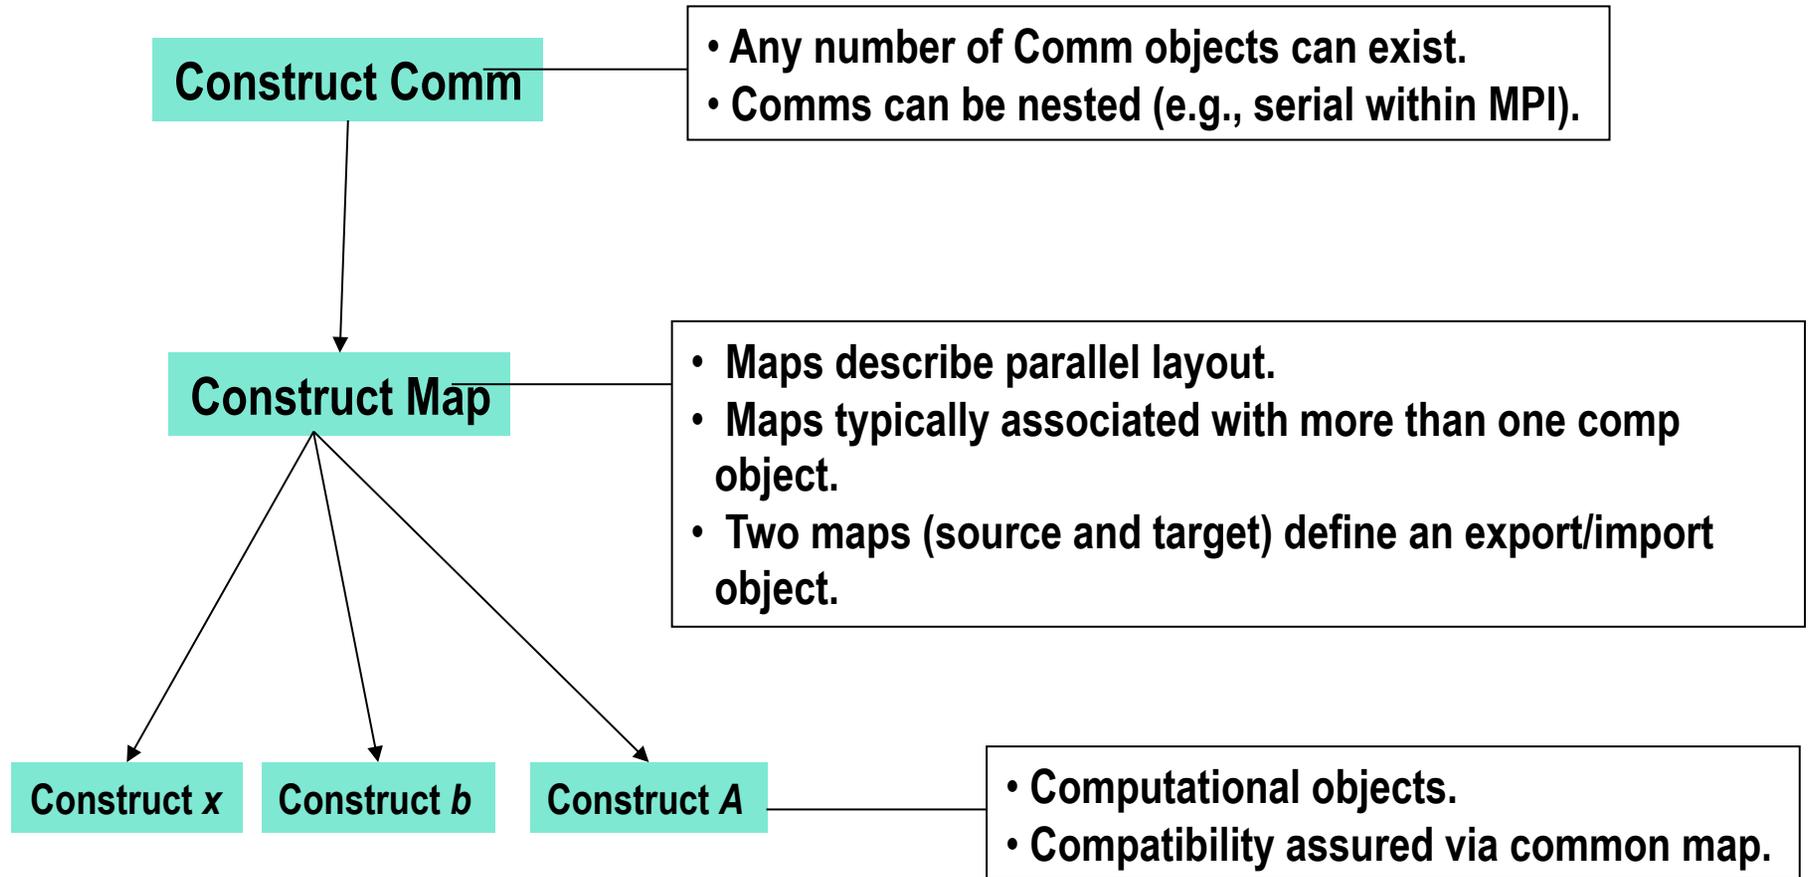



Petra Implementations

- Epetra (Essential Petra):
 - ◆ Current production version
 - ◆ Uses stable core subset of C++ (circa 2000)
 - ◆ Restricted to real, double precision arithmetic
 - ◆ Interfaces accessible to C and Fortran users
- Tpetra (Templated Petra):
 - ◆ Next-generation version
 - ◆ Needs a modern C++ compiler (but not C++0x)
 - ◆ Supports arbitrary scalar and index types via templates
 - Arbitrary- and mixed-precision arithmetic
 - 64-bit indices for solving problems with >2 billion unknowns
 - ◆ Hybrid MPI / shared-memory parallel
 - Supports multicore CPU and hybrid CPU/GPU
 - Built on Kokkos manycore node library



Developers: Chris Baker, Mike Heroux, Rob Hoekstra, Alan Williams

A Simple Epetra/AztecOO Program

```
// Header files omitted...
int main(int argc, char *argv[]) {
  Epetra_SerialComm Comm();
```

```
// ***** Map puts same number of equations on each pe *****
```

```
int NumMyElements = 1000 ;
Epetra_Map Map(-1, NumMyElements, 0, Comm);
int NumGlobalElements = Map.NumGlobalElements();
```

```
// ***** Create an Epetra_Matrix tridiag(-1,2,-1) *****
```

```
Epetra_CrsMatrix A(Copy, Map, 3);
double negOne = -1.0; double posTwo = 2.0;
```

```
for (int i=0; i<NumMyElements; i++) {
  int GlobalRow = A.GRID(i);
  int RowLess1 = GlobalRow - 1;
  int RowPlus1 = GlobalRow + 1;
  if (RowLess1!=-1)
    A.InsertGlobalValues(GlobalRow, 1, &negOne, &RowLess1);
  if (RowPlus1!=NumGlobalElements)
    A.InsertGlobalValues(GlobalRow, 1, &negOne, &RowPlus1);
  A.InsertGlobalValues(GlobalRow, 1, &posTwo, &GlobalRow);
}
A.FillComplete(); // Transform from GIDs to LIDs
```

```
// ***** Create x and b vectors *****
Epetra_Vector x(Map);
Epetra_Vector b(Map);
b.Random(); // Fill RHS with random #s
```


```
// ***** Create Linear Problem *****
Epetra_LinearProblem problem(&A, &x, &b);
```

```
// ***** Create/define AztecOO instance, solve *****
AztecOO solver(problem);
solver.SetAztecOption(AZ_precond, AZ_Jacobi);
solver.Iterate(1000, 1.0E-8);
```

```
// ***** Report results, finish *****
cout << "Solver performed " << solver.NumIters()
  << " iterations." << endl
  << "Norm of true residual = "
  << solver.TrueResidual()
  << endl;
```

```
return 0;
}
```

Petra Object Model



Perform redistribution of distributed objects:

- Parallel permutations.
- “Ghosting” of values for local computations.
- Collection of partial results from remote processors.

Base Class for All Distributed Objects:

- Performs all communication.
- Requires Check, Pack, Unpack methods from derived class.

Graph class for structure-only computations:

- Reusable matrix structure.
- Pattern-based preconditioners.
- Pattern-based load balancing tools.
- Redistribution of matrices, vectors, etc...

Basic sparse matrix class:





- Flexible construction process.
- Arbitrary entry placement on parallel machine.

Describes layout of distributed objects:

- Vectors: Number of vectors
- Matrices/graphs: Rows
- Called “Maps” in Epetra

Dense Distributed Vector and Matrices:

- Simple local data structure.
- BLAS-able, LAPACK-able.
- Ghostable, redistributable.
- RTop-able.

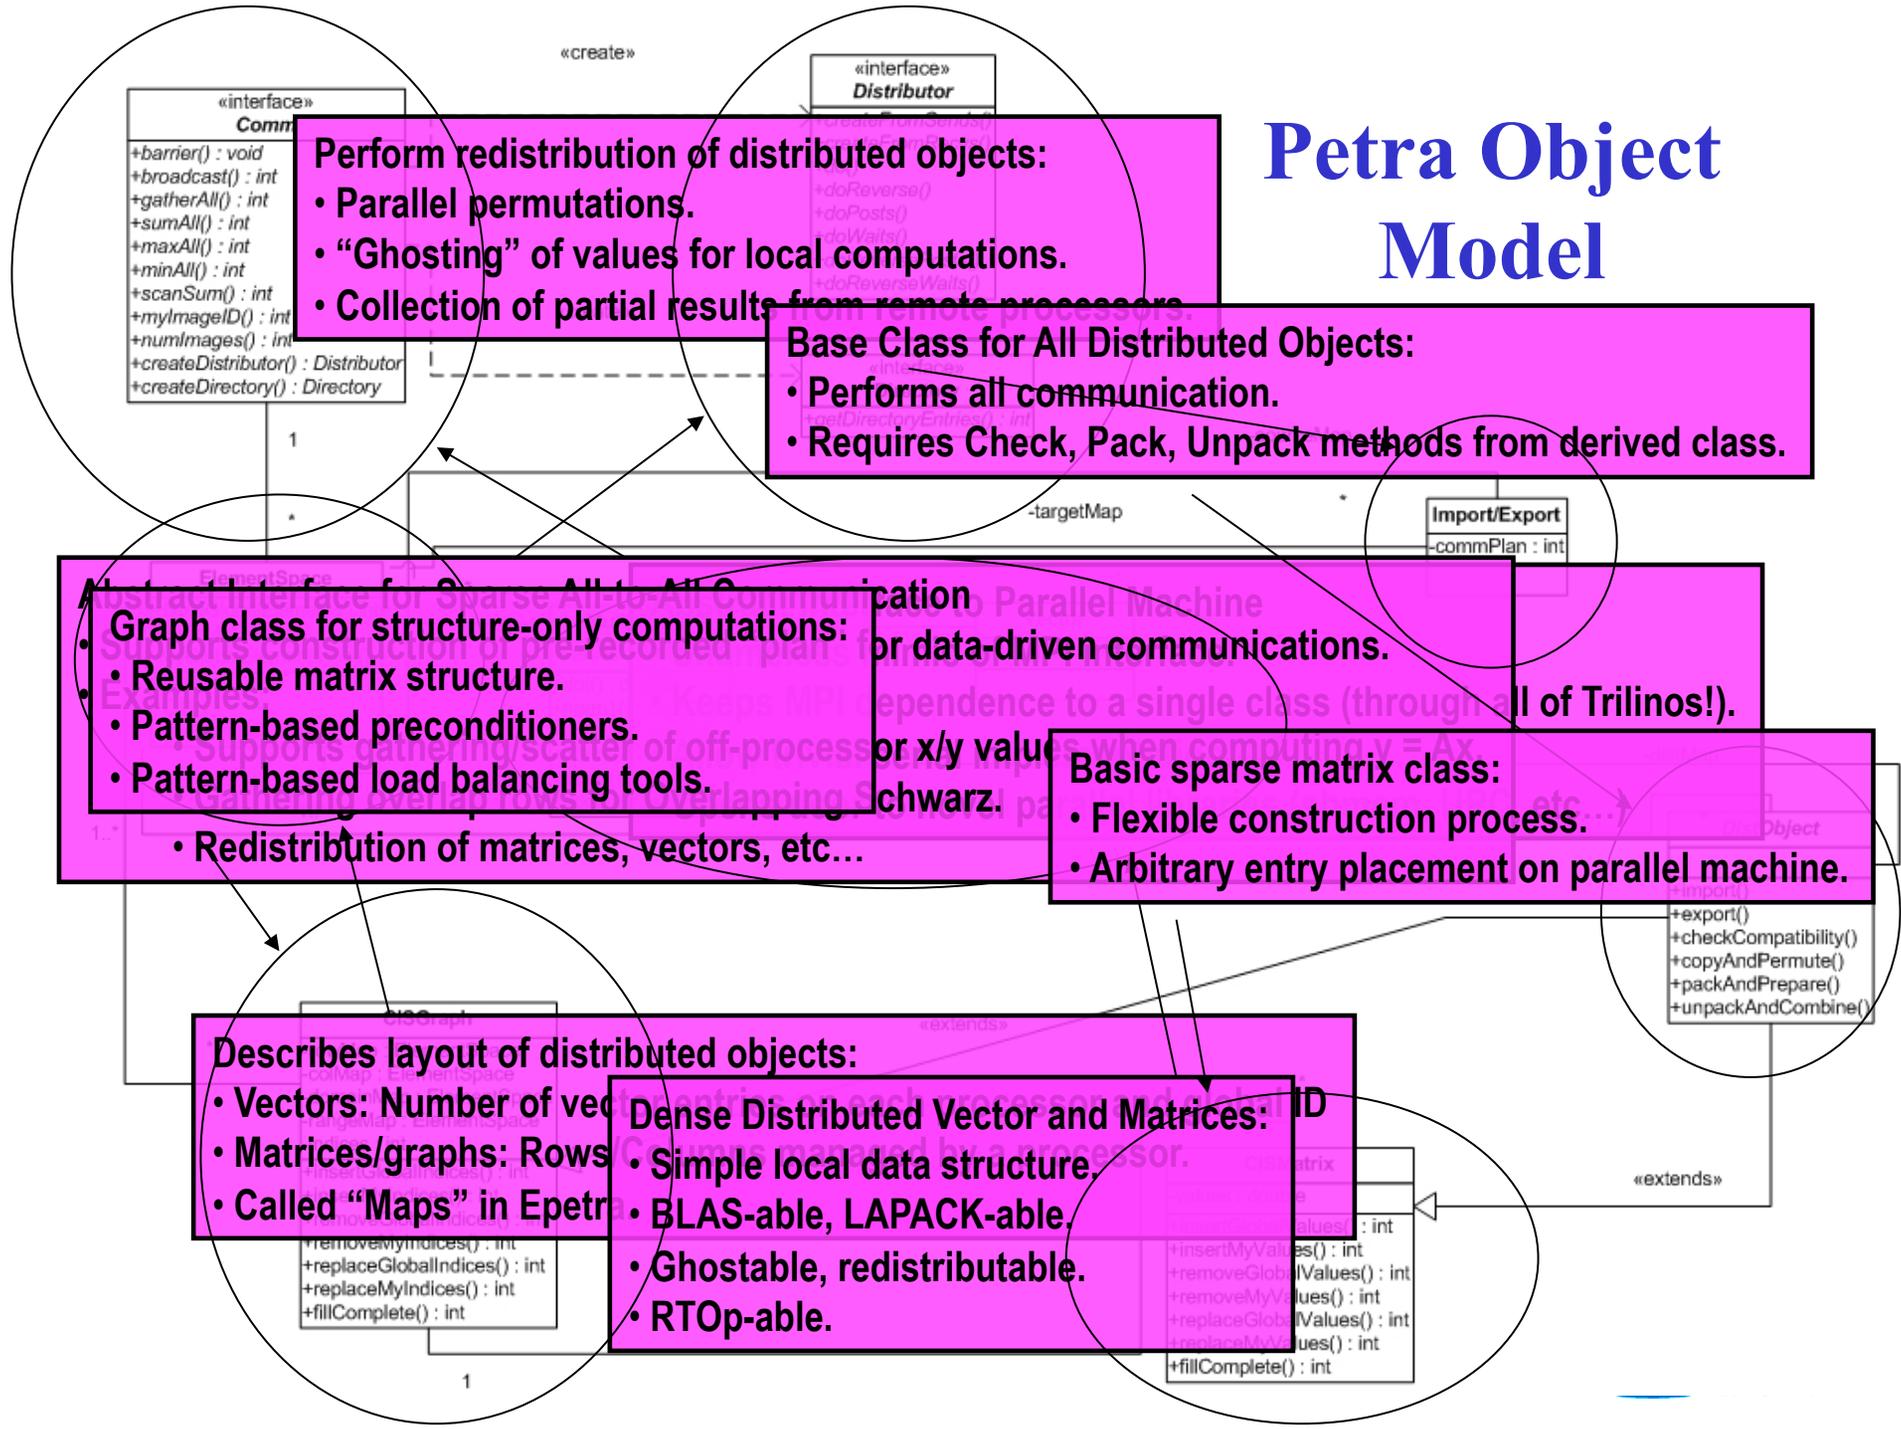

Details about Epetra Maps

- Note: Focus on Maps (not BlockMaps).
- Getting beyond standard use case...
- **Note: All of the concepts presented here for Epetra carry over to Tpetra!**

1-to-1 Maps

- A map is 1-to-1 if...
 - ◆ Each global ID appears only once in the map
 - ◆ (and is thus associated with only a single processor)
- Certain operations in parallel data repartitioning require 1-to-1 maps:
 - ◆ Source map of an import must be 1-to-1.
 - ◆ Target map of an export must be 1-to-1.
 - ◆ Domain map of a 2D object must be 1-to-1.
 - ◆ Range map of a 2D object must be 1-to-1.

2D Objects: Four Maps

- Epetra 2D objects:
 - ♦ CrsMatrix, FECrsMatrix
 - ♦ CrsGraph
 - ♦ VbrMatrix, FEVbrMatrix

Typically a 1-to-1 map

- Have four maps:

Typically NOT a 1-to-1 map

- ♦ **RowMap**: On each processor, the global IDs of the **rows** that processor will “manage.”
- ♦ **ColMap**: On each processor, the global IDs of the **columns** that processor will “manage.”
- ♦ **DomainMap**: The layout of domain objects (the x (multi)vector in $y = Ax$).
- ♦ **RangeMap**: The layout of range objects (the y (multi)vector in $y = Ax$).

Must be 1-to-1 maps!!!

Sample Problem

$$\begin{matrix} \mathbf{y} \\ \left[\begin{array}{c} y_1 \\ y_2 \\ y_3 \end{array} \right] \end{matrix} = \begin{matrix} \mathbf{A} \\ \left[\begin{array}{ccc} 2 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 2 \end{array} \right] \end{matrix} \begin{matrix} \mathbf{x} \\ \left[\begin{array}{c} x_1 \\ x_2 \\ x_3 \end{array} \right] \end{matrix}$$

Case 1: Standard Approach

- ◆ First 2 rows of A , elements of y and elements of x , kept on PE 0.
- ◆ Last row of A , element of y and element of x , kept on PE 1.

PE 0 Contents

$$y = \begin{bmatrix} y_1 \\ y_2 \end{bmatrix}, \dots A = \begin{bmatrix} 2 & -1 & 0 \\ -1 & 2 & -1 \end{bmatrix}, \dots x = \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

- RowMap = {0, 1}
- ColMap = {0, 1, 2}
- DomainMap = {0, 1}
- RangeMap = {0, 1}

PE 1 Contents

$$y = [y_3], \dots A = [0 \quad -1 \quad 2], \dots x = [x_3]$$

- RowMap = {2}
- ColMap = {1, 2}
- DomainMap = {2}
- RangeMap = {2}

Original Problem

$$\begin{matrix} y & & A & & x \\ \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} & = & \begin{bmatrix} 2 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 2 \end{bmatrix} & & \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \end{matrix}$$

Notes:

- Rows are wholly owned.
- RowMap=DomainMap=RangeMap (all 1-to-1).
- ColMap is NOT 1-to-1.
- Call to FillComplete: `A.FillComplete(); // Assumes`

Case 2: Twist 1

- ◆ First 2 rows of A , first element of y and last 2 elements of x , kept on PE 0.
- ◆ Last row of A , last 2 element of y and first element of x , kept on PE 1.

PE 0 Contents

$$y = [y_1], \dots A = \begin{bmatrix} 2 & -1 & 0 \\ -1 & 2 & -1 \end{bmatrix}, \dots x = \begin{bmatrix} x_2 \\ x_3 \end{bmatrix}$$

- RowMap = {0, 1}
- ColMap = {0, 1, 2}
- DomainMap = {1, 2}
- RangeMap = {0}

PE 1 Contents

$$y = \begin{bmatrix} y_2 \\ y_3 \end{bmatrix}, \dots A = [0 \quad -1 \quad 2], \dots x = [x_1]$$

- RowMap = {2}
- ColMap = {1, 2}
- DomainMap = {0}
- RangeMap = {1, 2}

Original Problem

$$\begin{matrix} y & & A & & x \\ \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} & = & \begin{bmatrix} 2 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 2 \end{bmatrix} & & \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \end{matrix}$$

Notes:

- Rows are wholly owned.
- RowMap is NOT = DomainMap
is NOT = RangeMap (all 1-to-1).
- ColMap is NOT 1-to-1.
- Call to FillComplete:
A.FillComplete(DomainMap, RangeMap);

Case 2: Twist 2

- ◆ First row of A , part of second row of A , first element of y and last 2 elements of x , kept on PE 0.
- ◆ Last row, part of second row of A , last 2 element of y and first element of x , kept on PE 1.

PE 0 Contents

$$y = [y_1], \dots A = \begin{bmatrix} 2 & -1 & 0 \\ -1 & 1 & 0 \end{bmatrix}, \dots x = \begin{bmatrix} x_2 \\ x_3 \end{bmatrix}$$

- RowMap = {0, 1}
- ColMap = {0, 1}
- DomainMap = {1, 2}
- RangeMap = {0}

PE 1 Contents

$$y = \begin{bmatrix} y_2 \\ y_3 \end{bmatrix}, \dots A = \begin{bmatrix} 0 & 1 & -1 \\ 0 & -1 & 2 \end{bmatrix}, \dots x = [x_1]$$

- RowMap = {1, 2}
- ColMap = {1, 2}
- DomainMap = {0}
- RangeMap = {1, 2}

Original Problem

$$\begin{matrix} y & & A & & x \\ \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} & = & \begin{bmatrix} 2 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 2 \end{bmatrix} & & \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \end{matrix}$$

Notes:

- Rows are NOT wholly owned.
- RowMap is NOT = DomainMap
is NOT = RangeMap (all 1-to-1).
- RowMap and ColMap are NOT 1-to-1.
- Call to FillComplete:
A.FillComplete(DomainMap, RangeMap);

What does FillComplete Do?

- A bunch of stuff.
- e.g., create import/export objects (if needed) for distributed sparse matrix-vector multiply:
 - ◆ If ColMap \neq DomainMap, create Import object.
 - ◆ If RowMap \neq RangeMap, create Export object.
- A few rules:
 - ◆ Rectangular matrices will *always* require:
`A.FillComplete(DomainMap, RangeMap);`
 - ◆ DomainMap and RangeMap *must be 1-to-1*.



How do I learn more?



How do I learn more?

- Documentation:
 - ◆ Trilinos tutorial: <http://trilinos.sandia.gov/Trilinos10.6Tutorial.pdf>
 - ◆ Per-package documentation: <http://trilinos.sandia.gov/packages/>
 - ◆ Trilinos Wiki with more examples:
<https://code.google.com/p/trilinos/wiki/>
- E-mail lists:
 - ◆ http://trilinos.sandia.gov/mail_lists.html
- Annual user meetings and tutorials:
 - ◆ DOE ACTS Tutorial (here we are!)
 - ◆ Trilinos User Group (TUG) meeting and tutorial
 - First week of November at SNL / NM
 - Talks available for download (slides and video):
 - http://trilinos.sandia.gov/events/trilinos_user_group_2010
 - http://trilinos.sandia.gov/events/trilinos_user_group_2009
 - http://trilinos.sandia.gov/events/trilinos_user_group_2008
 - ◆ NEW! “EuroTUG” (in Europe)
 - Planned for the first week of June 2012



How do I get Trilinos?

- Current release (10.6) available for download:
 - ◆ <http://trilinos.sandia.gov/download/trilinos-10.6.html>
 - ◆ Source tarball with sample build scripts

- Cray packages recent releases of Trilinos
 - ◆ <http://www.nersc.gov/users/software/programming-libraries/math-libraries/trilinos/>
 - ◆ `$ module load trilinos`

- LGPL or BSD license (depending on the package)



Hands-on tutorial

- Trilinos Wiki
 - ◆ <https://code.google.com/p/trilinos/wiki/TrilinosHandsOnTutorial>
 - ◆ Example codes: <https://code.google.com/p/trilinos/w/list>
 - ◆ All examples are working codes
 - Tested with Trilinos 10.4 and 10.7 (development branch)
- Web interface to Trilinos
 - ◆ <https://www.users.csbsju.edu/trilinos/WebTrilinosMPI/c++/index.html>
 - ◆ Development branch of Trilinos (10.7)
 - ◆ Need username and password (will give these out later)
 - ◆ All you need is a web browser!
 - Copy, paste, and edit code examples in box
- Trilinos is also installed on NERSC machines
- If there is interest, I'll help install it on your machine too



Extra Slides

External Visibility



- Awards: R&D 100, HPC SW Challenge (04).
- www.cfd-online.com:

Trilinos 😊

A project led by Sandia to develop an object-oriented software framework for scientific computations. This is an active project which includes several state-of-the-art solvers and lots of other nice things a software engineer writing CFD codes would find useful. Everything is freely available for download once you have registered. Very good!

- Industry Collaborations: Various.
- Linux distros: Debian, Mandriva, Ubuntu, Fedora.
- SciDAC TOPS-2 partner, EASI (with ORNL, UT-Knoxville, UIUC, UC-Berkeley).
- Over 10,000 downloads since March 2005.
- Occasional unsolicited external endorsements such as the following two-person exchange on mathforum.org:
 - > The consensus seems to be that OO has little, if anything, to offer
 - > (except bloat) to numerical computing.I would completely disagree. A good example of using OO in numerics is Trilinos: <http://software.sandia.gov/trilinos/>



Trilinos / PETSc Interoperability

- Epetra_PETScAIJMatrix class
 - ◆ Derives from Epetra_RowMatrix
 - ◆ Wrapper for serial/parallel PETSc aij matrices
 - ◆ Utilizes callbacks for matrix-vector product, getrow
 - ◆ No deep copies
- Enables PETSc application to construct and call virtually any Trilinos preconditioner
- ML accepts fully constructed PETSc KSP solvers as smoothers
 - ◆ Fine grid only
 - ◆ Assumes fine grid matrix is really PETSc aij matrix
- Complements Epetra_PETScAIJMatrix class
 - ◆ For any smoother with getrow kernel, PETSc implementation should be *much* faster than Trilinos
 - ◆ For any smoother with matrix-vector product kernel, PETSc and Trilinos implementations should be comparable

Linear System Solves


AztecOO

- Aztec is the previous workhorse solver at Sandia:
 - ◆ Extracted from the MPSalsa reacting flow code.
 - ◆ Installed in dozens of Sandia apps.
- AztecOO leverages the investment in Aztec:
 - ◆ Uses Aztec iterative methods and preconditioners.
- AztecOO improves on Aztec by:
 - ◆ Using Epetra objects for defining matrix and RHS.
 - ◆ Providing more preconditioners/scalings.
 - ◆ Using C++ class design to enable more sophisticated use.
- AztecOO interfaces allows:
 - ◆ Continued use of Aztec for functionality.
 - ◆ Introduction of new solver capabilities outside of Aztec.
- Belos is coming along as alternative.
 - ◆ AztecOO will not go away.
 - ◆ Will encourage new efforts and refactorings to use Belos.

AztecOO Extensibility

- AztecOO is designed to accept externally defined:
 - ◆ **Operators** (both A and M):
 - The linear operator A is accessed as an Epetra_Operator.
 - Users can register a preconstructed preconditioner as an Epetra_Operator.
 - ◆ **RowMatrix:**
 - If A is registered as a RowMatrix, Aztec's preconditioners are accessible.
 - Alternatively M can be registered separately as an Epetra_RowMatrix, and Aztec's preconditioners are accessible.
 - ◆ **StatusTests:**
 - Aztec's standard stopping criteria are accessible.
 - Can override these mechanisms by registering a StatusTest Object.

AztecOO understands Epetra_Operator

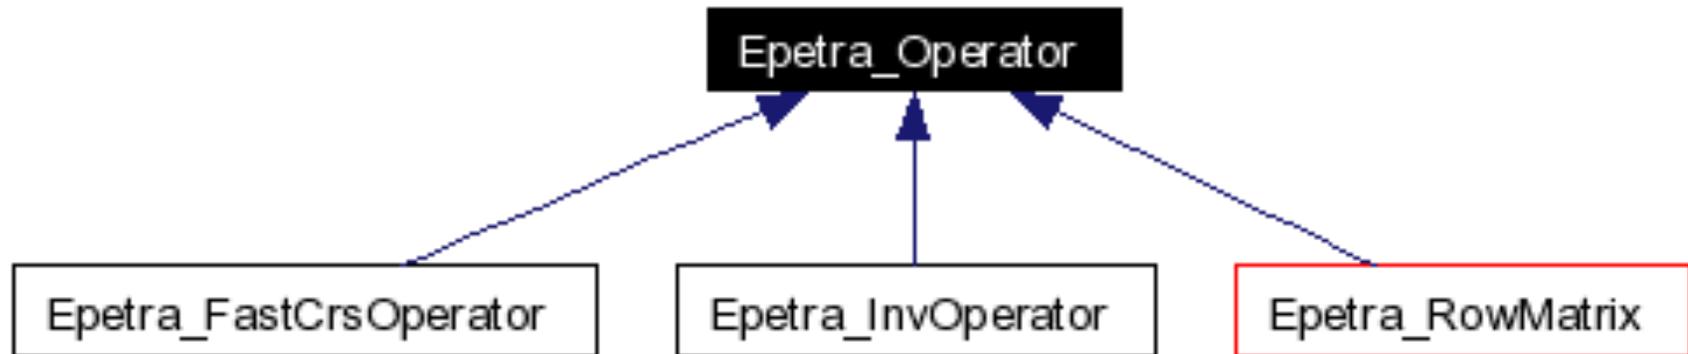

- AztecOO is designed to accept externally defined:
 - ◆ Operators (both A and M).
 - ◆ RowMatrix (Facilitates use of AztecOO preconditioners with external A).
 - ◆ StatusTests (externally-defined stopping criteria).



Belos and Anasazi

- Next generation linear solver / eigensolver library, written in templated C++.
- Provide a generic interface to a collection of algorithms for solving large-scale linear problems / eigenproblems.
- Algorithm implementation is accomplished through the use of traits classes and abstract base classes:
 - ◆ e.g.: MultiVecTraits, OperatorTraits
 - ◆ e.g.: SolverManager, Eigensolver / Iteration, Eigenproblem/ LinearProblem, StatusTest, OrthoManager, OutputManager
- Includes block linear solvers / eigensolvers:
 - ◆ Higher operator performance.
 - ◆ More reliable.
- Solves:
 - ◆ $AX = X\Lambda$ or $AX = BX\Lambda$ (Anasazi)
 - ◆ $AX = B$ (Belos)



Why are Block Solvers Useful?

- Block Solvers (in general):
 - ◆ Achieve better performance for operator-vector products.
- Block Eigensolvers ($Op(A)X = LX$):
 - ◆ Reliably determine multiple and/or clustered eigenvalues.
 - ◆ Example applications: Modal analysis, stability analysis, bifurcation analysis (LOCA)
- Block Linear Solvers ($Op(A)X = B$):
 - ◆ Useful for when multiple solutions are required for the same system of equations.
 - ◆ Example applications:
 - Perturbation analysis
 - Optimization problems
 - Single right-hand sides where A has a handful of small eigenvalues
 - Inner-iteration of block eigensolvers



Linear / Eigensolver Software Design

Belos and Anasazi are solver libraries that:

1. Provide an abstract interface to an operator-vector products, scaling, and preconditioning.
2. Allow the user to enlist any linear algebra package for the elementary vector space operations essential to the algorithm. (Epetra, PETSc, etc.)
3. Allow the user to define convergence of any algorithm (a.k.a. status testing).
4. Allow the user to determine the verbosity level, formatting, and processor for the output.
5. Allow these decisions to be made at runtime.
6. Allow for easier creation of new solvers through “managers” using “iterations” as the basic kernels.

Nonlinear System Solves



NOX/LOCA: Nonlinear Solver and Analysis Algorithms

NOX and LOCA are a combined package for solving and analyzing sets of nonlinear equations.

- NOX: Globalized Newton-based solvers.
- LOCA: Continuation, Stability, and Bifurcation Analysis.

We define the nonlinear problem:

given $F : \mathbb{R}^n \rightarrow \mathbb{R}^n$,


find $x_* \in \mathbb{R}^n$ such that $F(x_*) = 0 \in \mathbb{R}^n$

F is the residual or function evaluation

x is the solution vector


$J \in \mathbb{R}^{n \times n}$ is the Jacobian Matrix defined by: $J_{ij} = \frac{\partial F_i}{\partial x_j}$

Nonlinear Solver Algorithms

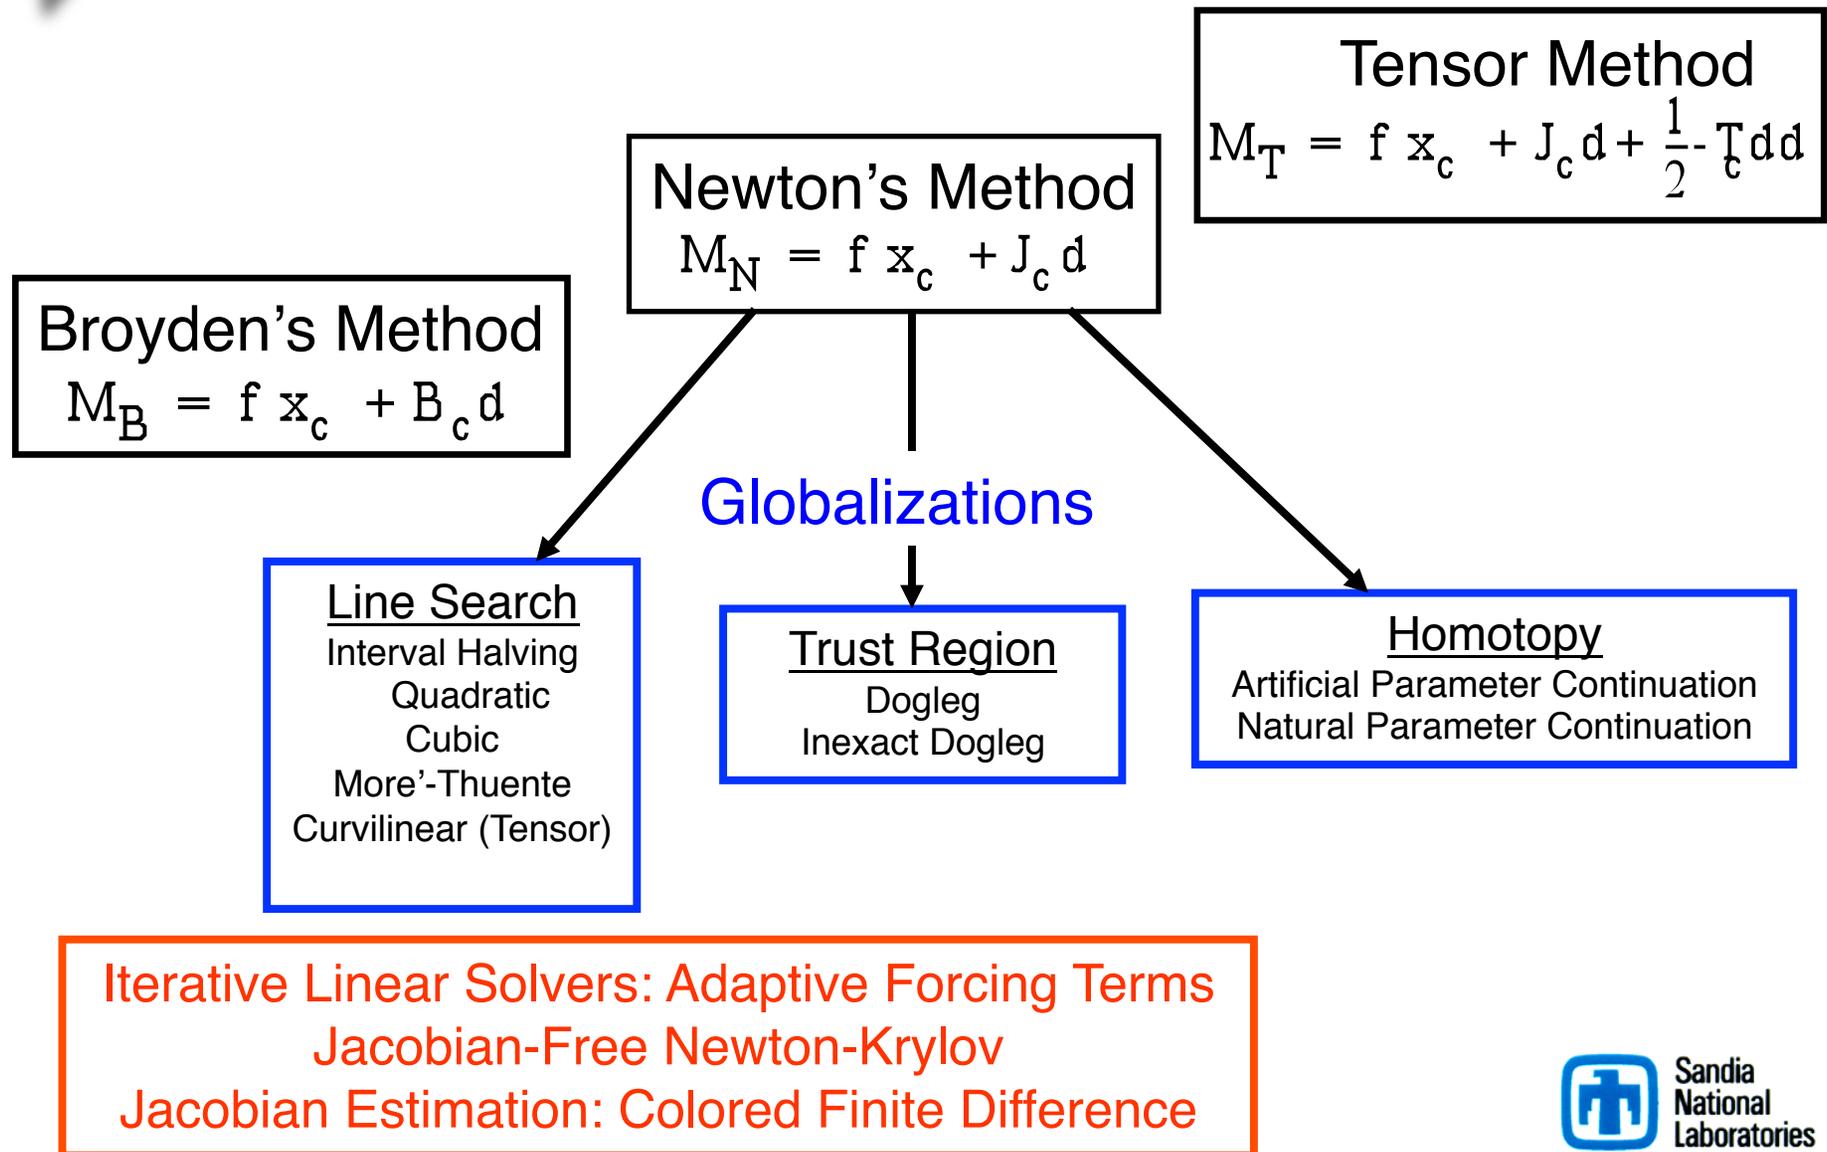

Building Blocks of NOX

Example: Newton's Method for $F(\mathbf{x}) = 0$

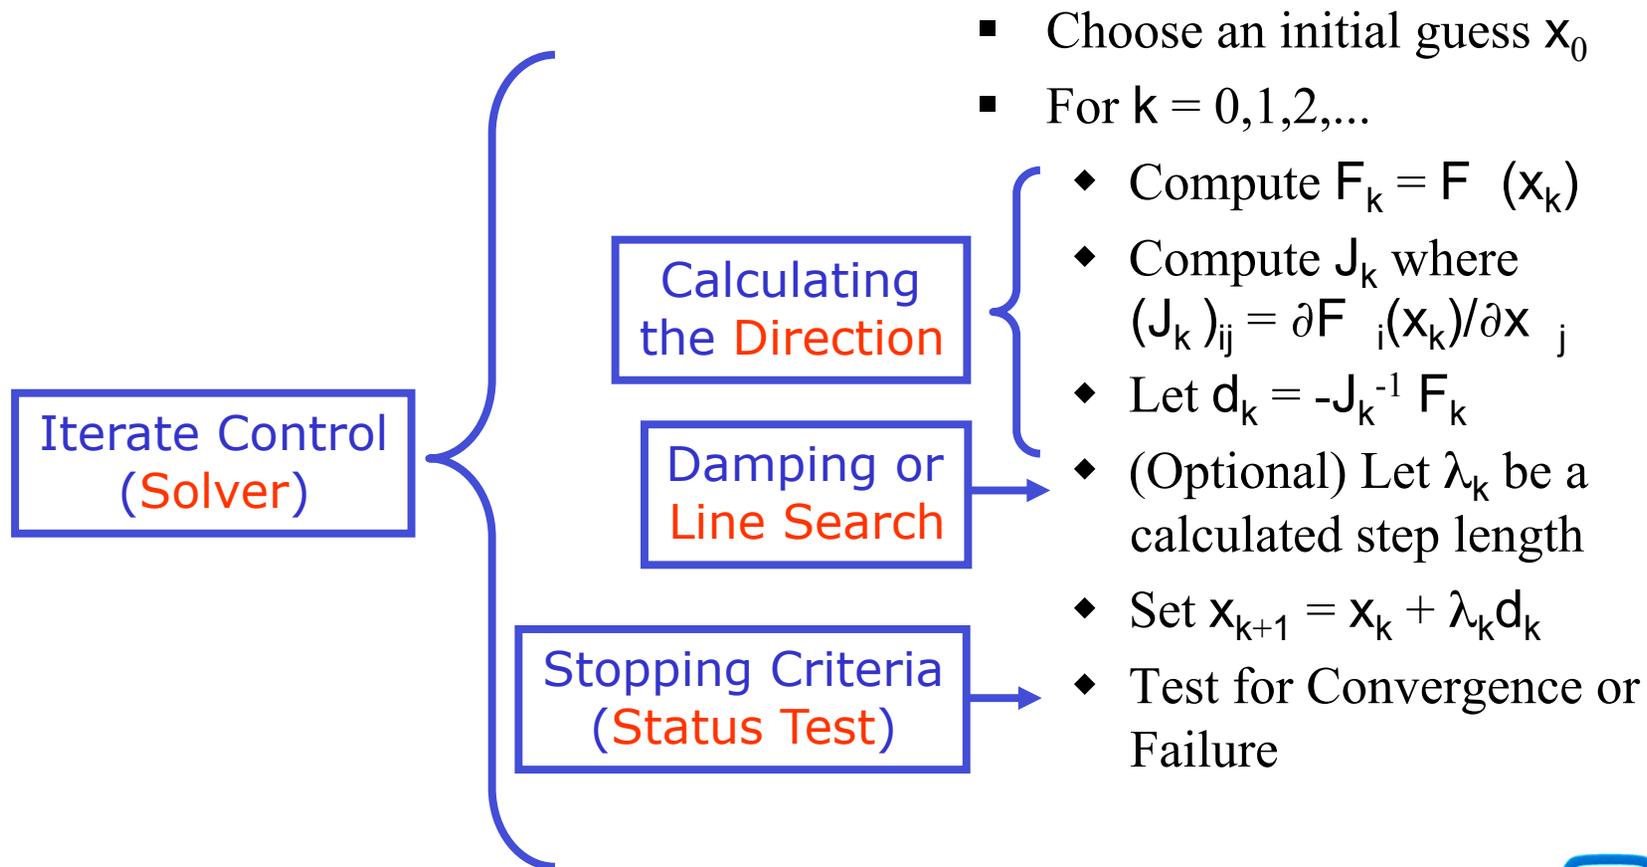

Stopping Criteria (StatusTests)

Highly Flexible Design: Users build a convergence test hierarchy and registers it with the solver (via solver constructor or reset method).

- Norm F: {Inf, One, Two} {absolute, relative} $\|F\| \leq \text{tol}$
- Norm Update ΔX : {Inf, One, Two} $\|x_k - x_{k-1}\| \leq \text{tol}$
- Norm Weighted Root Mean Square (WRMS):

$$C \sqrt{\frac{1}{N} \sum_{i=1}^N \left(\frac{x_i^k - x_i^{k-1}}{\text{RTOL}|x_i^{k-1}| + \text{ATOL}_i} \right)^2} \leq \text{tol}$$


- **Max Iterations:** Failure test if solver reaches max # iters
- **FiniteValue:** Failure test that checks for NaN and Inf on $\|F\|$
- **Stagnation:** Failure test that triggers if the convergence rate fails a tolerance check for n consecutive iterations.

$$\frac{\|F_k\|}{\|F_{k-1}\|} \geq \text{tol}$$

- **Combination:** {AND, OR}
- **Users Designed:** Derive from NOX::StatusTest::Generic

Building a Status Test

- Converge if both: $\|F\| \leq 1.0E - 6$ $\|\delta x\|_{WRMS} \leq 1.0$
- Fail if value of $\|F\|$ becomes Nan or Inf
- Fail if we reach maximum iterations

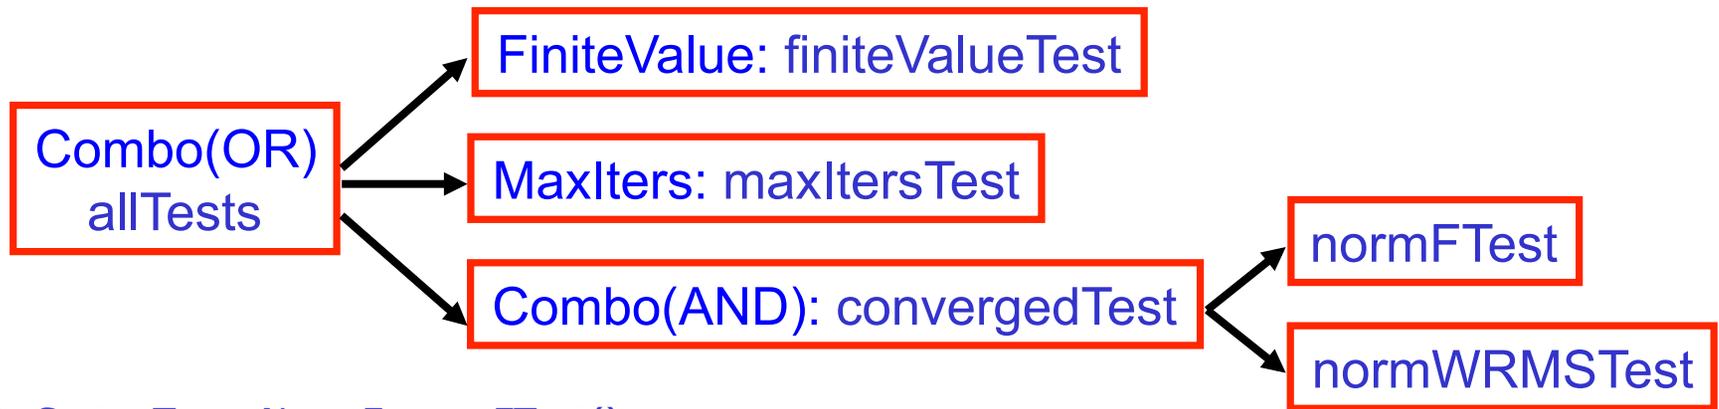

```
NOX::StatusTest::NormF normFTest();  
NOX::StatusTest::NormWRMS normWRMSTest();  
NOX::StatusTest::Combo convergedTest(NOX::StatusTest::Combo::AND);  
convergedTest.addStatusTest(normFTest);  
convergedTest.addStatusTest(normWRMSTest);  
NOX::StatusTest::FiniteValue finiteValueTest;  
NOX::StatusTest::MaxItrs maxItrsTest(200);  
NOX::StatusTest::Combo allTests(NOX::StatusTest::Combo::OR);  
allTests.addStatusTest(finiteValueTest);  
allTests.addStatusTest(maxItrsTest);  
allTests.addStatusTest(convergedTest);
```

Status Tests Continued

```
-- Final Status Test Results --
Converged....OR Combination ->
  Converged....AND Combination ->
    Converged....F-Norm = 3.567e-13 < 1.000e-08
      (Length-Scaled Two-Norm, Absolute Tolerance)
    Converged....WRMS-Norm = 1.724e-03 < 1
      (Min Step Size: 1.000e+00 >= 1)
      (Max Lin Solv Tol: 4.951e-14 < 0.5)
  ??.....Finite Number Check (Two-Norm F) = Unknown
  ??.....Number of Iterations = -1 < 200
```

User Defined are Derived from NOX::StatusTest::Generic

```
NOX::StatusTest::StatusType checkStatus(const NOX::Solver::Generic &problem)
```

```
NOX::StatusTest::StatusType
```

```
checkStatusEfficiently(const NOX::Solver::Generic &problem,
                       NOX::StatusTest::CheckType checkType)
```

```
NOX::StatusTest::StatusType getStatus() const
```

```
ostream& print(ostream &stream, int indent=0) const
```



NOX Interface

NOX solver methods are **ANAs**, and are implemented in terms of group/vector abstract interfaces:


Group	Vector
<code>computeF()</code>	<code>innerProduct()</code>
<code>computeJacobian()</code>	<code>scale()</code>
<code>applyJacobianInverse()</code>	<code>norm()</code>
	<code>update()</code>

NOX solvers will work with any group/vector that implements these interfaces.

Four concrete implementations are supported:


1. LAPACK
2. EPETRA
3. PETSc
4. Thyra (Release 8.0)

NOX Interface

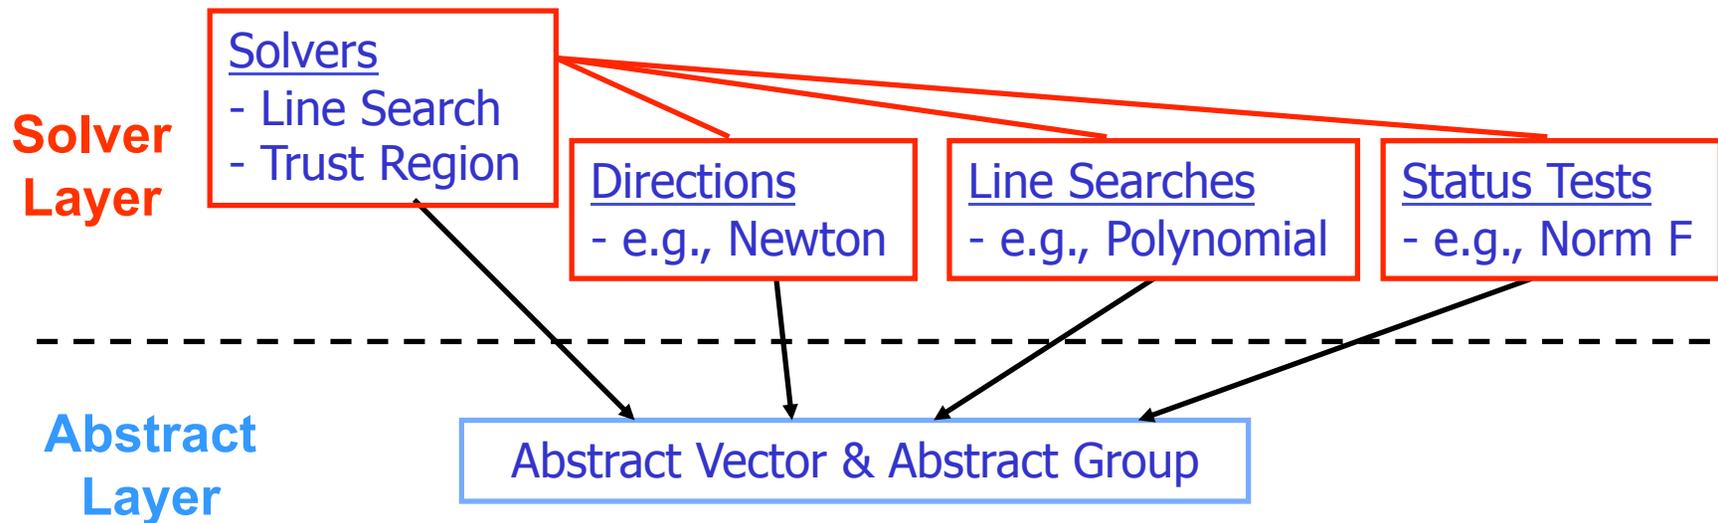

- Don't need to directly access the vector or matrix entries, only manipulate the objects.
- NOX uses an abstract interface to manipulate linear algebra objects.
- Isolate the Solver layer from the linear algebra implementations used by the application.
- This approach means that NOX does NOT rely on any specific linear algebra format.
- Allows the apps to tailor the linear algebra to their own needs!
 - Serial or Parallel
 - Any Storage format: User Defined, LAPACK, PETSc, Epetra

NOX Framework

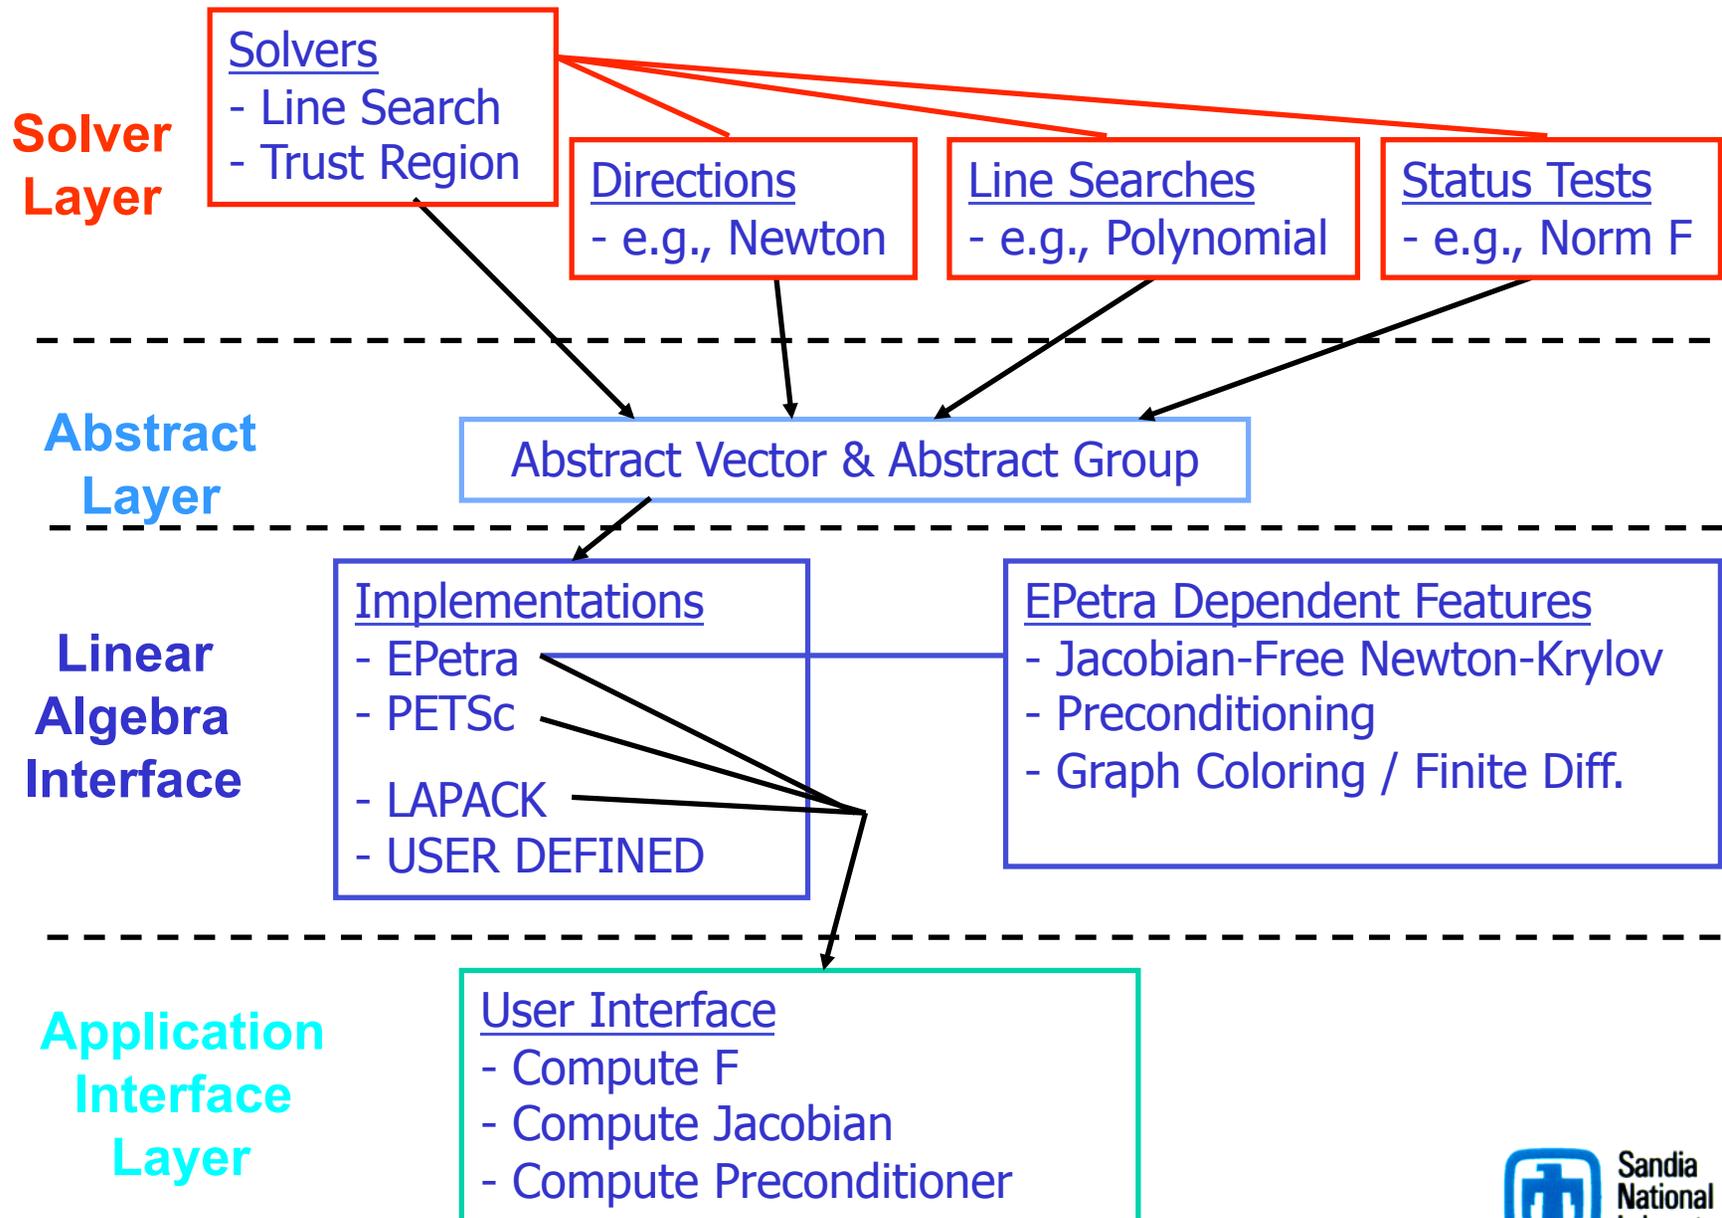

The Epetra “Goodies”

- Matrix-Free Newton-Krylov Operator
 - Derived from `Epetra_Operator`
 - Can be used to estimate Jacobian action on a vector
 - `NOX::Epetra::MatrixFree`

$$Jy = \frac{F(x+y) - F(x)}{y}$$

- Finite Difference Jacobian
 - Derived from an `Epetra_RowMatrix`
 - Can be used as a preconditioner matrix
 - `NOX::Epetra::FiniteDifference`

$$J_j = \frac{F(x + e_j) - F(x)}{e_j}$$

- Graph Colored Finite Difference Jacobian
 - Derived from `NOX::Epetra::FiniteDifference`
 - Fast Jacobian fills – need connectivity/coloring graph
 - (`NOX::Epetra::FiniteDifferenceColoring`)
- Full interface to AztecOO using NOX parameter list
- Preconditioners: internal AztecOO, lpack, User defined
- Scaling object



Trilinos Awards

- 2004 R&D 100 Award
- SC2004 HPC Software Challenge Award
- Sandia Team Employee Recognition Award
- Lockheed-Martin Nova Award Nominee



EpetraExt: Extensions to Epetra

- Library of useful classes not needed by everyone
- Most classes are types of “transforms”.
- Examples:
 - ◆ Graph/matrix view extraction.
 - ◆ Epetra/Zoltan interface.
 - ◆ Explicit sparse transpose.
 - ◆ Singleton removal filter, static condensation filter.
 - ◆ Overlapped graph constructor, graph colorings.
 - ◆ Permutations.
 - ◆ Sparse matrix-matrix multiply.
 - ◆ Matlab, MatrixMarket I/O functions.
- Most classes are small, useful, but non-trivial to write.

Developer: Robert Hoekstra, Alan Williams, Mike Heroux